



COLUMN SCHEDULE:


COL.TYPE.	MIX / STEEL	COLUMN SIZE axb	REINFORCEMENT	C/S OF COLUMN	TIES&LINKS axb
C1	M-25 / Fe500	ø 12"	● 8-#12mm		1 TIE #8@6"c/c
C2	M-25 / Fe500	9"x15"	● 4-#16mm ○ 4-#12mm		1 TIE+ 1 LINK #8@6"c/c
C3	M-25 / Fe500	9"x18"	● 8-#16mm		1 TIE+ 1 LINK #8@6"c/c

FOOTING SCHEDULE:

GROUP	MIX	SIZE AxB	DEPTH D	REINFORCEMENT LONGER DIRECTION	REINFORCEMENT SHORTER DIRECTION
F1	M-25	4'-0"x4'-0"	14"	#10-10Nos	#10-10Nos
F2	M-25	5'-0"x5'-0"	16"	#10-12Nos	#10-12Nos
F3	M-25	6'-0"x6'-0"	18"	#10-15Nos	#10-15Nos

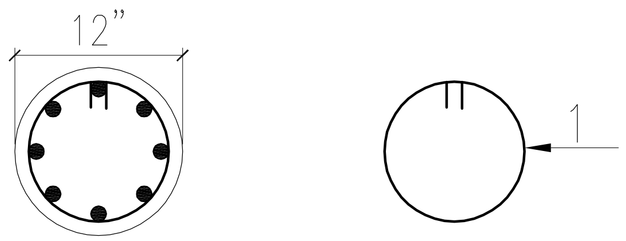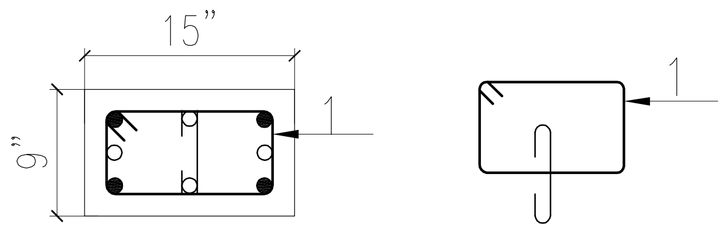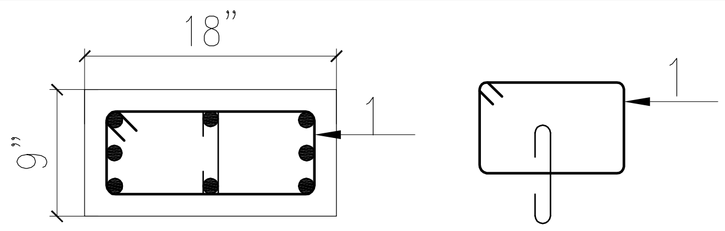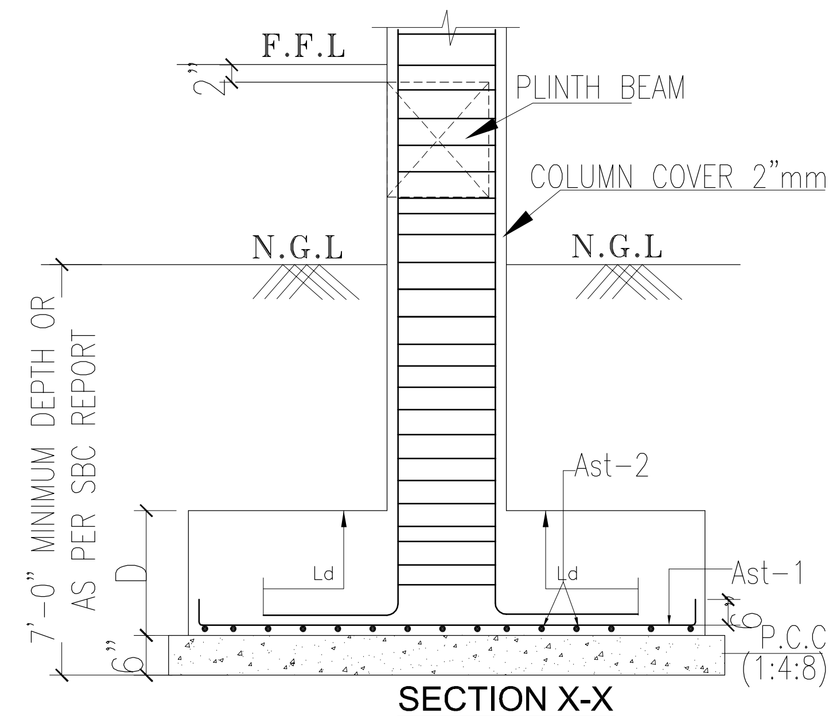

SECTION X-X

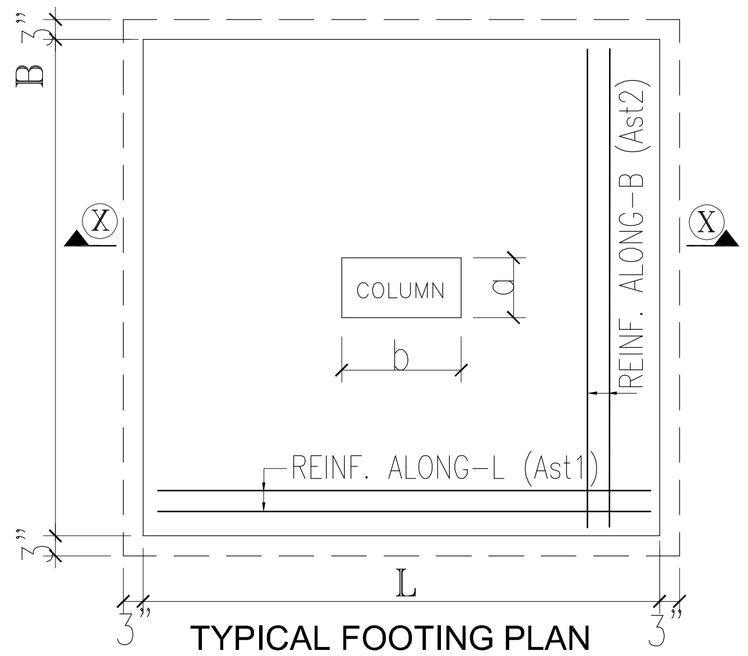

TYPICAL FOOTING PLAN

GENERAL NOTES:

1. DO NOT SCALE THIS DRAWING. FOLLOW FIGURED DIMENSIONS ONLY.
2. ALL DIMENSIONS ARE IN MM ONLY AND LEVELS ARE IN METERS UNLESS SPECIFIED.
3. S.B.C OF SOIL IS CONSIDERED AS 270 KN/M^2 @ 2.0M DEPTH
4. USE VIBRATED REINFORCED CONCRETE CONFORMING TO IS:456-2000. THE GRADES FOR DIFFERENT COMPONENTS ARE AS FOLLOWS

COMPONENT	FOOTING	COLUMNS	BEAMS	SLABS	WATER TANK SIDE WALLS
MIX	M25	M25	M25	M25	M25

5. GRADE OF STEEL SHALL BE Fe 500 CONFORMING TO IS:1786-85 & AMENDMENTS.
6. LAPS SHALL BE STAGGERED AND LAP LENGTHS ARE AS FOLLOWS.

MIX	M25
Ld	48 Dia

7. NOT MORE THAN 50% OF COLUMN REINFORCEMENT SHALL BE LAPPED AT A PARTICULAR LOCATION.
8. CLEAR COVERS ARE AS FOLLOWS

FOOTING TO MAIN BAR	PEDESTAL TO MAIN BAR	COLUMN TO MAIN BAR	BEAMS TO STIRRUPS	SLABS TO MAIN BAR
2"	2"	2"	1"	1"

9. CURING SHOULD BE DONE ATLEAST FOR 21 DAYS.
10. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH RELEVANT ARCHITECTURAL DRAWINGS.
11. STRIPPING TIME OF FORMWORK SHALL CONFORM TO CLAUSE 11.3 OF IS:456-2000.
12. FOR TIES,LINKS IN COLUMNS Y8-6"c/c REFER COLUMN SCHEDULE DWG.
13. FOR EXACT LOCATION OF WALLS REFER RELEVANT ARCHITECTURAL DRAWINGS FOR NECESSARY DETAILS.
14. ANY DISCREPANCY FROM THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF CONSULTANTS.
15. THIS STRUCTURE IS DESIGNED FOR GROUND FLOOR ONLY

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, STRUCTURAL AND SERVICES DRAWINGS. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS AND RESOLVED AS SOON AS POSSIBLE BUT ALWAYS PRIOR TO

DIRECTION: N

ARCHITECTURAL CONSULTANT:

also. design

STRUCTURAL& MEP CONSULTANTS

JASHRITHA ASSOCIATES AND MEP PLANNERS
4th FLOOR,#81, HIG 121, KPHB COLONY, KUKATPALLY, (SUB BRANCH:SRI NAGAR, ERRAGADDA) HYDERABAD 500072, TELANGANA, INDIA.
Phone : 9700441106,
E-mail: jashreyesh.consultants@gmail.com
& jashitha.mep@gmail.com

PROJECT:

ANKURA HOMES_THE WOODS AT KEESARAGUTTA

DRAWING TITLE:

FARM HOUSE BUILDING MARKING PLAN

DESIGN ENGG : AJAY	APPROVED :
SCALE : NTS	DRAWN : PK
DATE : 06-10-2026	CHECKED : PRADEEP
DRAWING NO: SD-02	REV.NO: