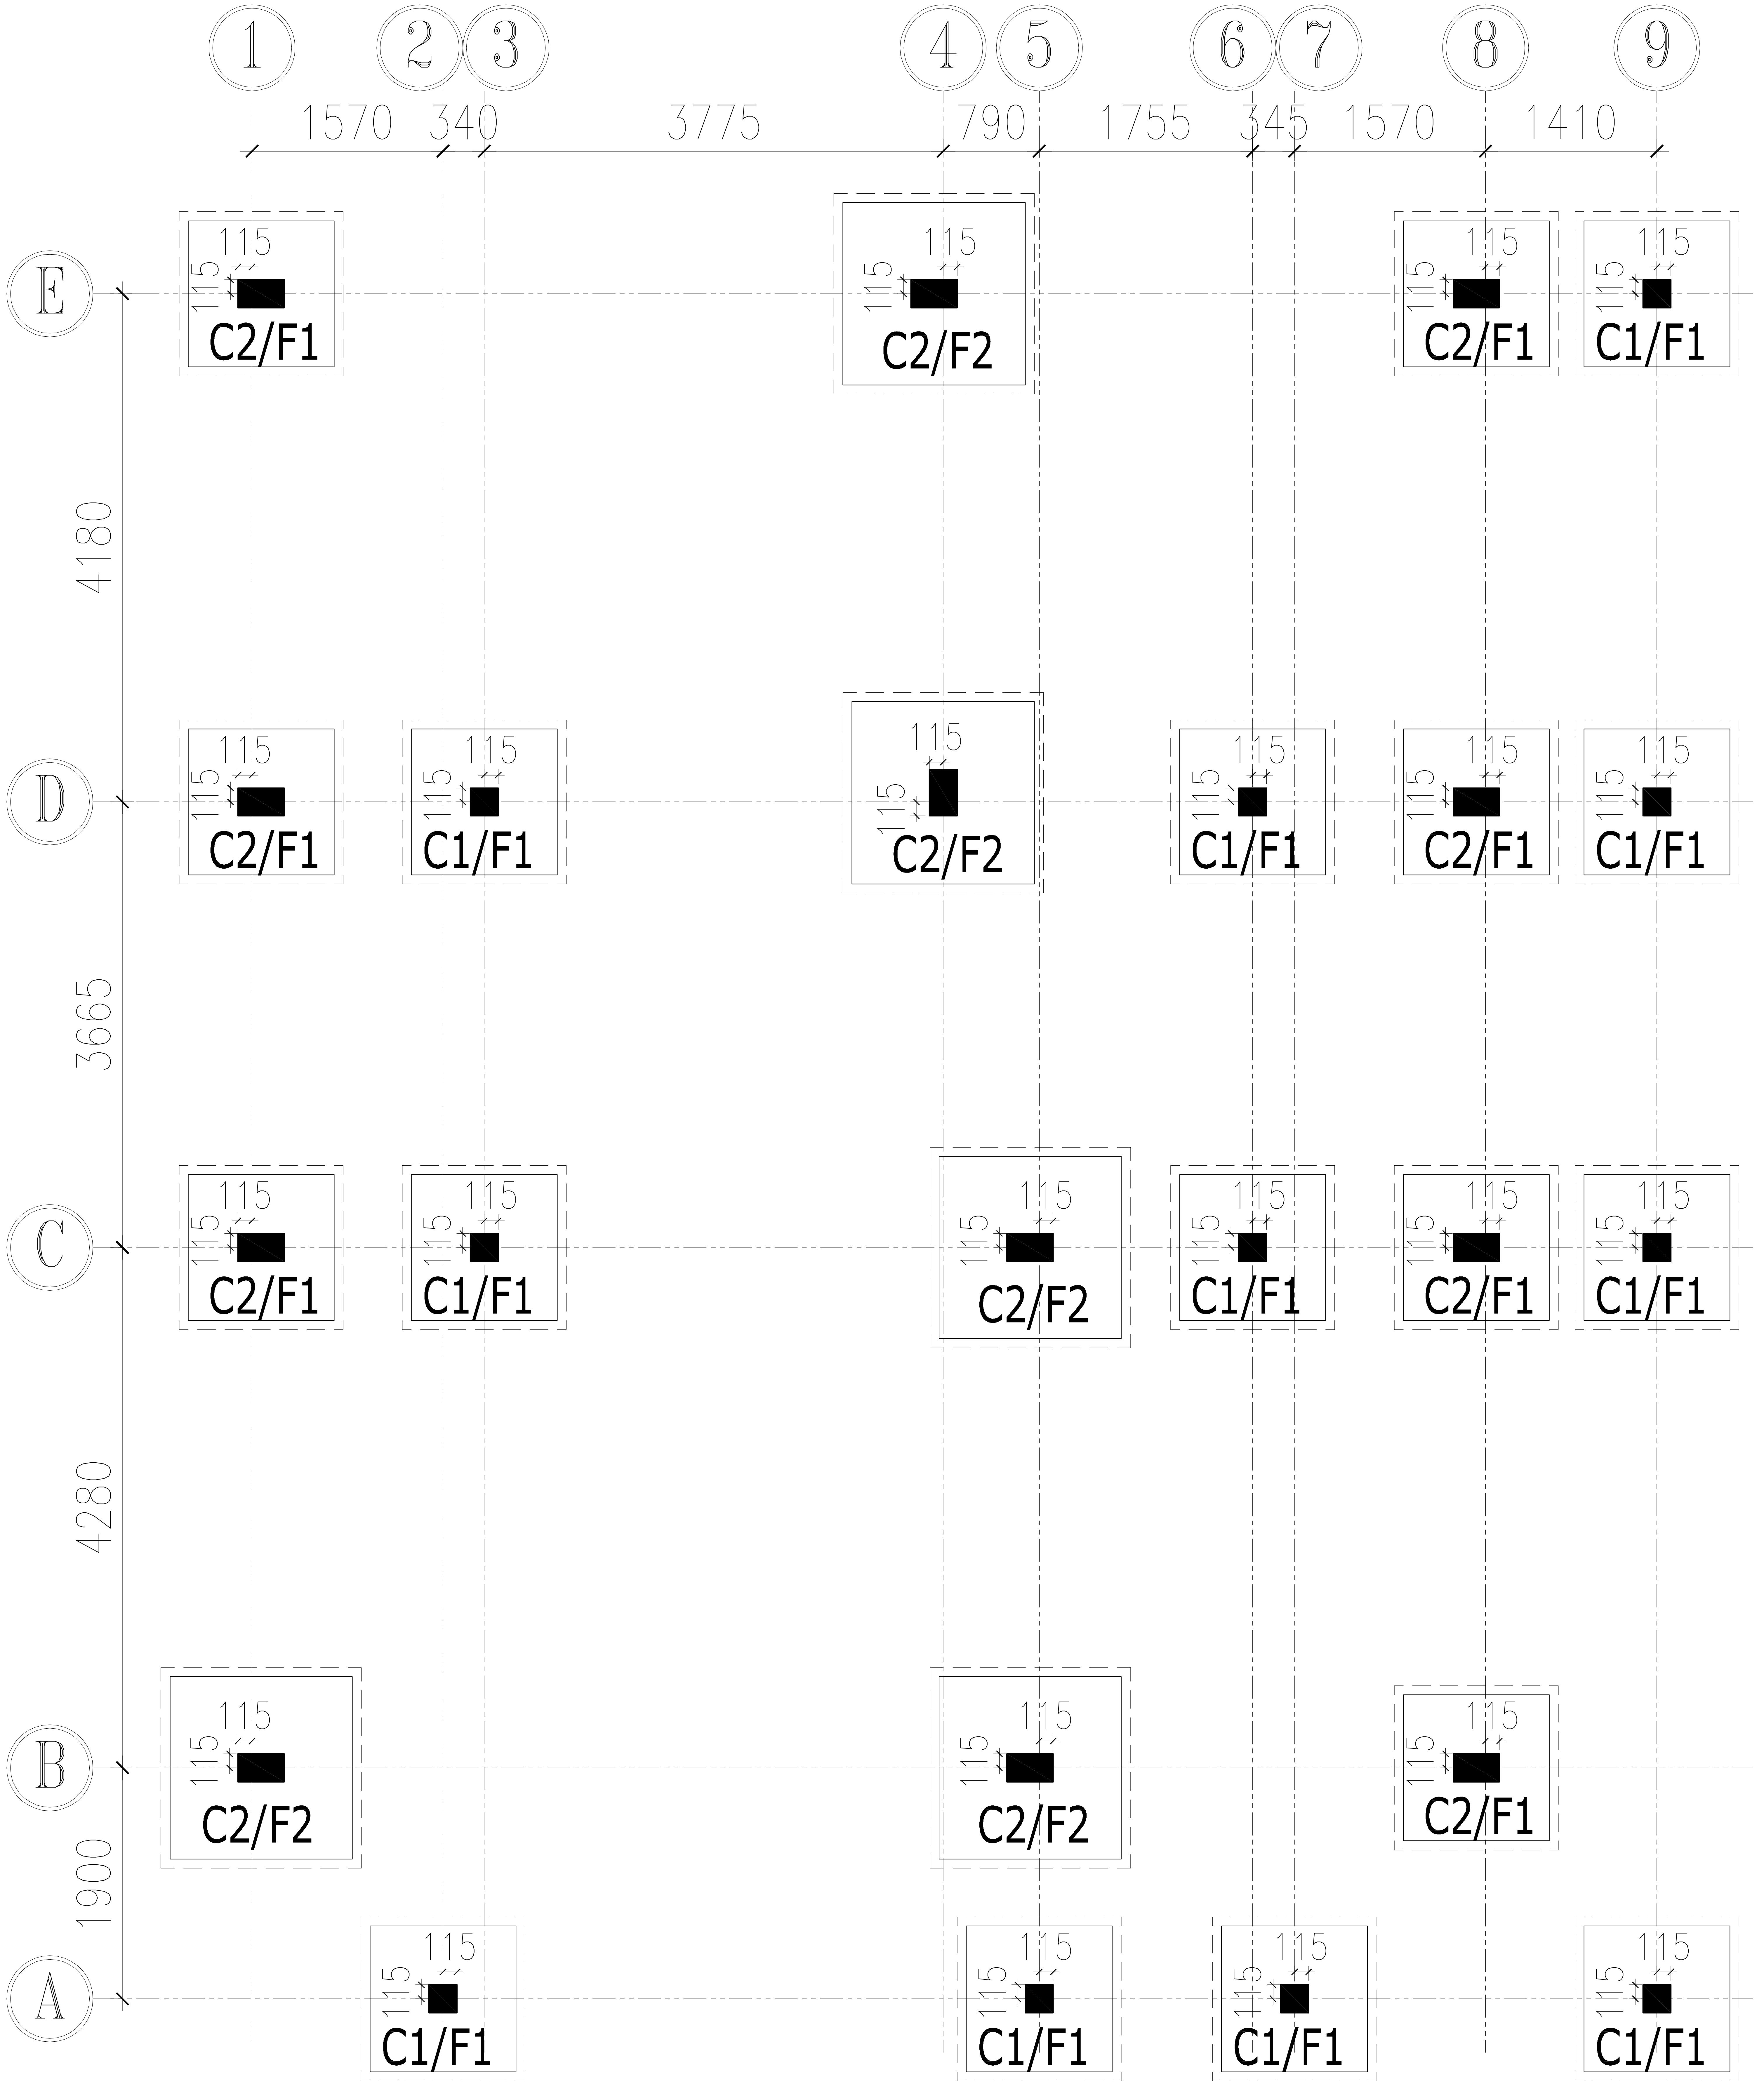
1
2
3
4
5
6
7
8
9
1570
340
3775
790
1755
345
1570
1410
E
D
C
B
A
4180
3665
4280
1900
115
C2/F1
C2/F2
C2/F1
C1/F1
C2/F1
C1/F1
C2/F2
C1/F1
C2/F1
C1/F1
C2/F1
C1/F1
C2/F2
C1/F1
C2/F1
C1/F1
C2/F2
C2/F2
C2/F1
C1/F1
C1/F1
C1/F1
C1/F1

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, STRUCTURAL AND SERVICES DRAWINGS. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS AND RESOLVED AS SOON AS POSSIBLE BUT ALWAYS PRIOR TO

DIRECTION:

ARCHITECTURAL CONSULTANT:

also.
design
a little story of design

STRUCTURAL& MEP CONSULTANTS

JASHRITHA ASSOCIATES
AND MEP PLANNERS
4th FLOOR(4B), HIG 129, KPHB COLONY, KUKATPALLY,
(SUB BRANCH:PR NAGAR ERRAGADDA.)
HYDERABAD 500072, TELANGANA, INDIA
Phone : 9700441106.
E-mail : jashreyansh.consultatns@gmail.com
& jashritha.mep@gmail.com

PROJECT:

ANKURA HOMES_THE WOODS
AT KEESARAGUTTA

DRAWING TITLE:

1215_EAST VILLA
MARKING PLAN

DESIGN ENGG : AJAY	APPROVED :
SCALE : NTS	DRAWN : PK
DATE : 23-09-2026	CHECKED : PRADEEP

DRAWING NO:	SD-01	REV.NO:	

COLUMN SCHEDULE

COLUMN ID	GRADE OF CONCRETE	COLUMN SIZE UPTO GROUND FLOOR ROOF	REFERENCE SECTION
C1	M - 25	230 x 230 #12 -4Nos	A1
C2	M - 25	230 x 380 #16 -4Nos + #12 -4Nos	A2

ARRANGEMENT OF TIES, LINKS & MAIN BARS IN COLUMN

4 BARS ARRANGEMENT	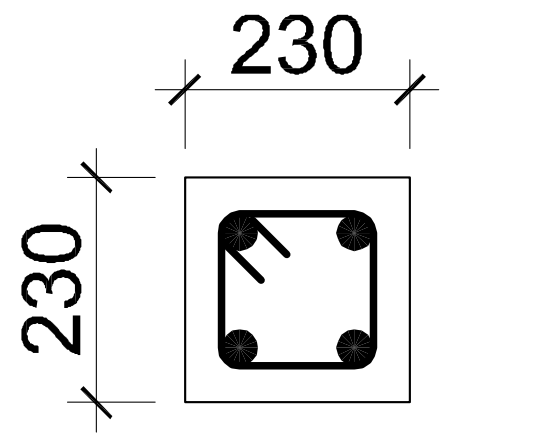 4 EQUAL DIA (A1)	8 BARS ARRANGEMENT	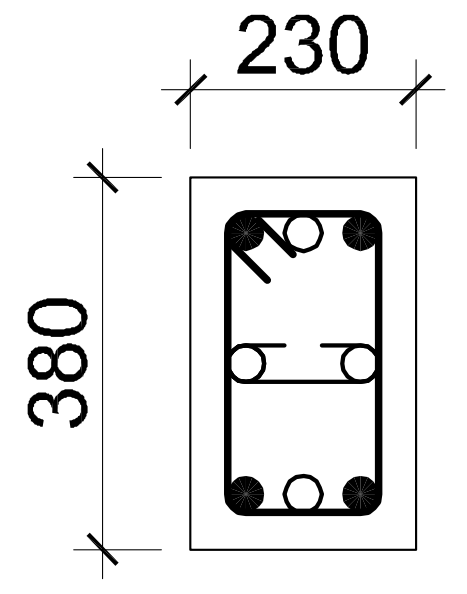 • 4 LARGER DIA ○ 4 LARGER DIA (A2)	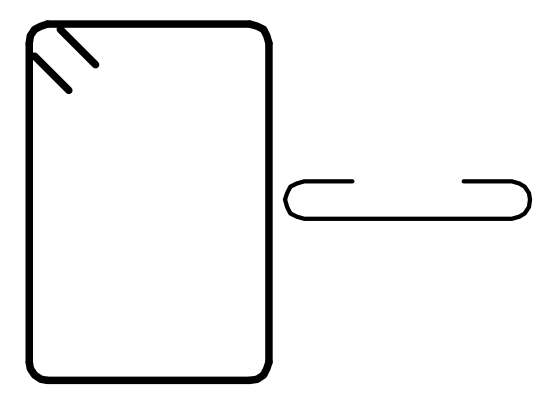 1 Tie + 1 Link #8 @150c/c

FLAT FOOTING SCHEDULE:

GROUP	MIX	SIZE	DEPTH	BOTTOM REINFORCEMENT PARALLEL TO	
				SHORTER DIRECTION	LONGER DIRECTION
F1	M - 25	1200 x 1200	375	#10 -10 NOS	#10 -10 NOS
F2	M - 25	1500 x 1500	400	#10 -15 NOS	#10 -15 NOS

GENERAL NOTES:

1. DO NOT SCALE THIS DRAWING. FOLLOW FIGURED DIMENSIONS ONLY.
2. ALL DIMENSIONS ARE IN MM ONLY AND LEVELS ARE IN METERS UNLESS SPECIFIED.
3. S.B.C OF SOIL IS CONSIDERED AS 270 KN/M^2 @ 2.0M DEPTH
4. USE VIBRATED REINFORCED CONCRETE CONFORMING TO IS:456-2000. THE GRADES FOR DIFFERENT COMPONENTS ARE AS FOLLOWS

COMPONENT	FOOTING	COLUMNS	BEAMS	SLABS	WATER TANK SIDE WALLS
MIX	M25	M25	M25	M25	M25

5. GRADE OF STEEL SHALL BE Fe 500 CONFORMING TO IS:1786-85 & AMENDMENTS.
6. LAPS SHALL BE STAGGERED AND LAP LENGTHS ARE AS FOLLOWS.

MIX	M25
Ld	48 Dia

7. NOT MORE THAN 50% OF COLUMN REINFORCEMENT SHALL BE LAPPED AT A PARTICULAR LOCATION.
8. CLEAR COVERS ARE AS FOLLOWS

FOOTING TO MAIN BAR	COLUMN TO MAIN BAR	BEAMS TO STIRRUPS	SLABS TO MAIN BAR
50mm	40mm	20mm	20mm

9. CURING SHOULD BE DONE ATLEAST FOR 21 DAYS.
10. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH RELEVANT ARCHITECTURAL DRAWINGS.
11. STRIPPING TIME OF FORMWORK SHALL CONFORM TO CLAUSE 11.3 OF IS:456-2000.
12. FOR TIES,LINKS IN COLUMNS Y8-150mm c/c REFER COLUMN SCHEDULE DWG.
13. FOR EXACT LOCATION OF WALLS REFER RELEVANT ARCHITECTURAL DRAWINGS FOR NECESSARY DETAILS.
14. ANY DISCREPANCY FROM THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF CONSULTANTS.
15. THE STRUCTURE IS DESIGNED FOR GROUND FLOOR ONLY

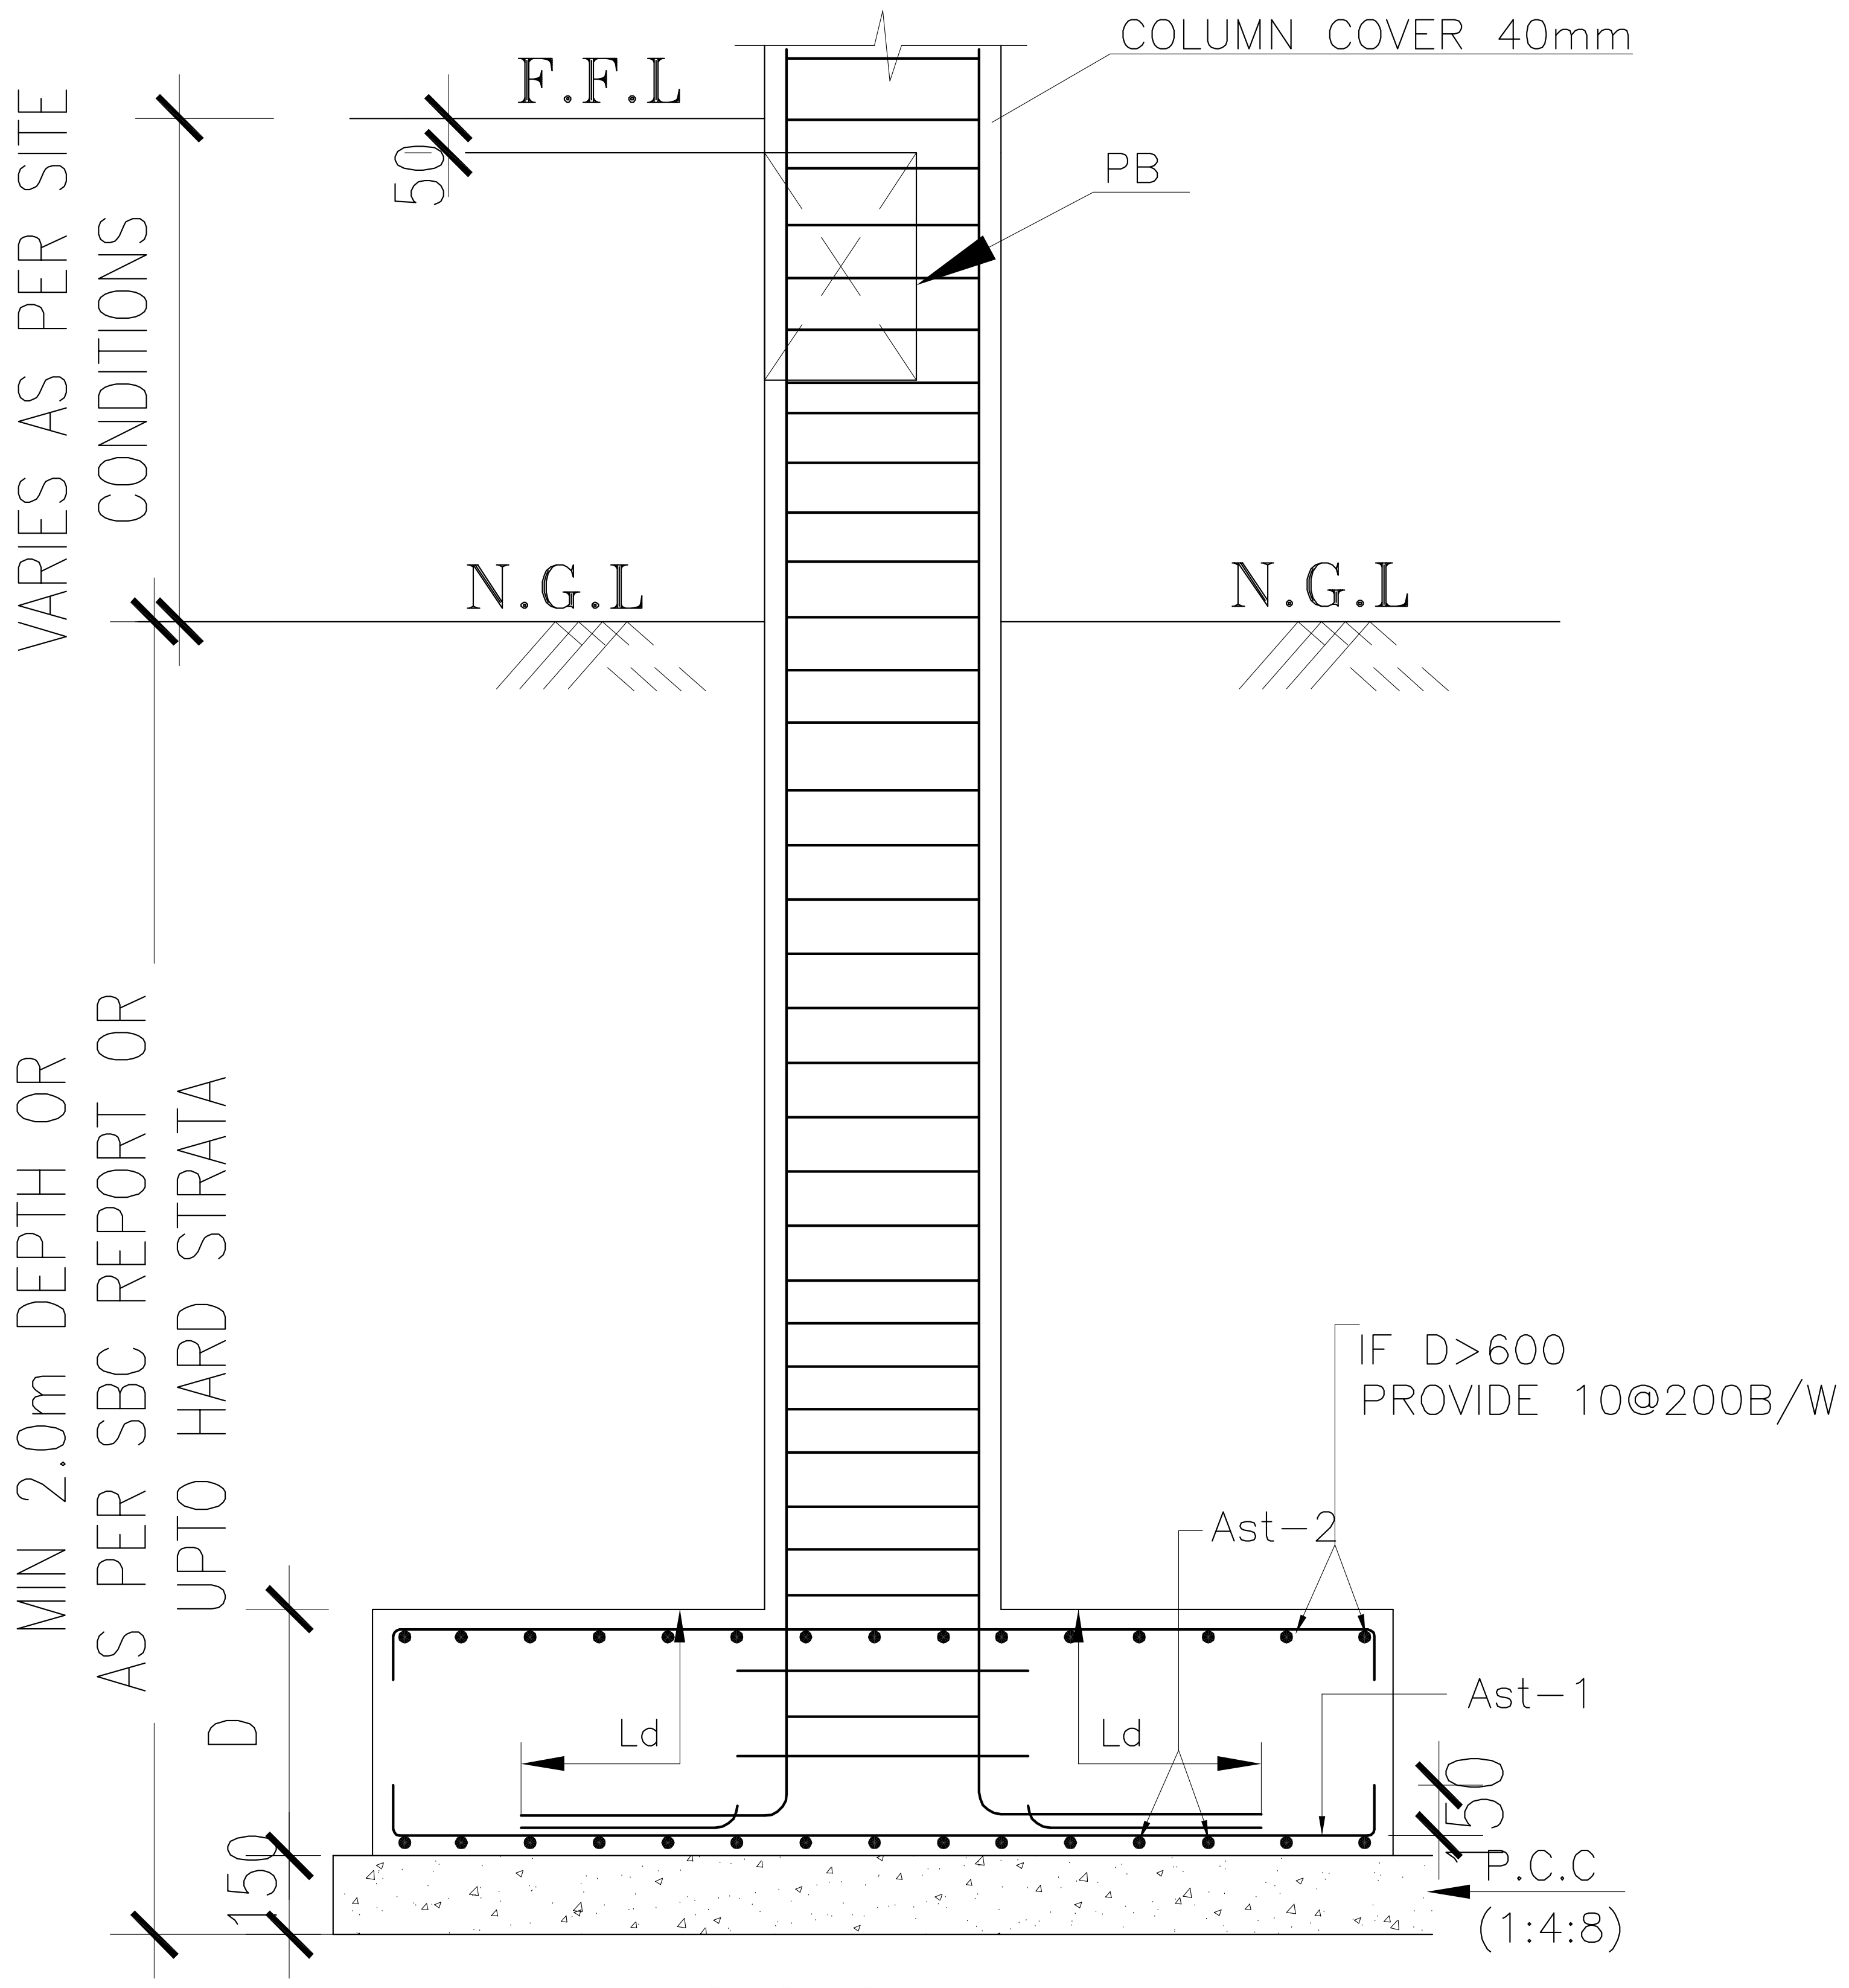

SECTION X-X

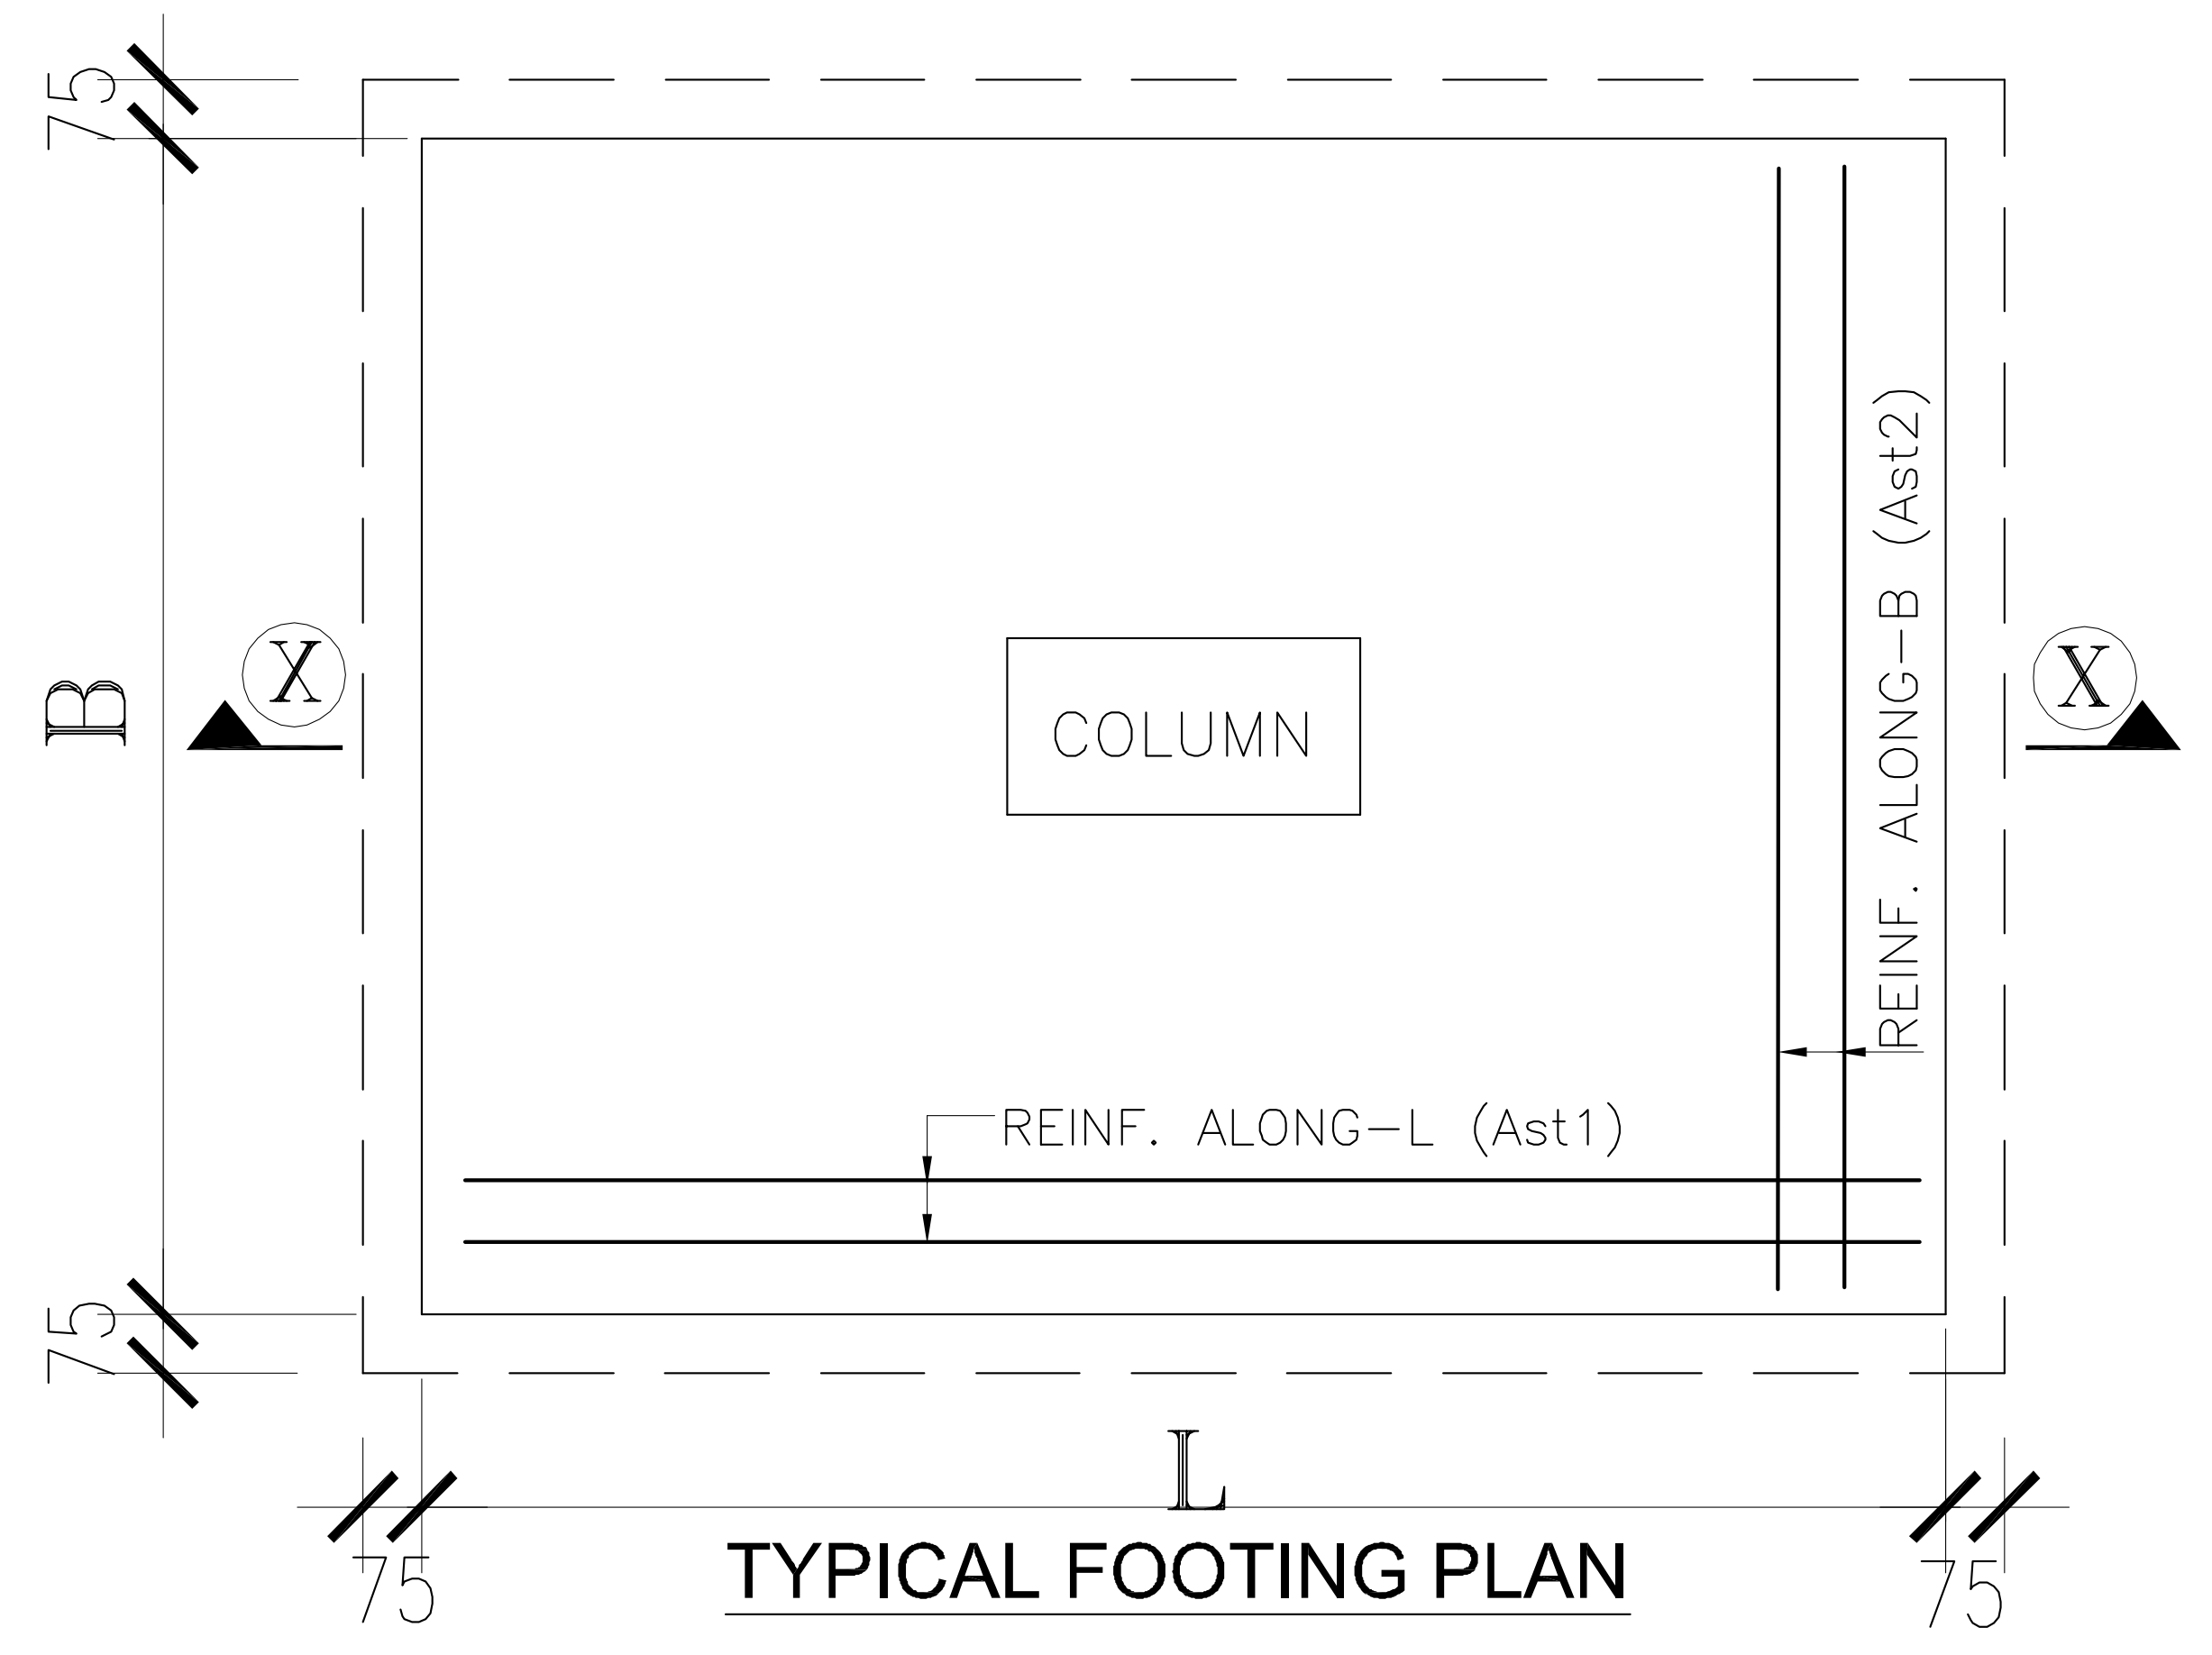

TYPICAL FOOTING PLAN

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, STRUCTURAL AND SERVICES DRAWINGS. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS AND RESOLVED AS SOON AS POSSIBLE BUT ALWAYS PRIOR TO

ARCHITECTURAL CONSULTANT:

also. design
a little story of design

STRUCTURAL& MEP CONSULTANTS

JASHRITHA ASSOCIATES
AND MEP PLANNERS
4th FLOOR(4B), HIG 129, KPHB COLONY, KUKATPALLY,
(SUB BRANCH:PR NAGAR ERRAGADDA.)
HYDERABAD 500072, TELANGANA, INDIA
Phone : 9700441106.
E-mail : jashreyansh.consultatns@gmail.com
& jashritha.mep@gmail.com

PROJECT:

ANKURA HOMES_THE WOODS
AT KEESARAGUTTA

DRAWING TITLE:

1215_EAST VILLA
COLUMN & FOOTING
SCHEDULE

DESIGN ENGG : AJAY	APPROVED :
SCALE : NTS	DRAWN : PK
DATE : 23-09-2026	CHECKED : PRADEEP

DRAWING NO: SD-02 REV.NO:

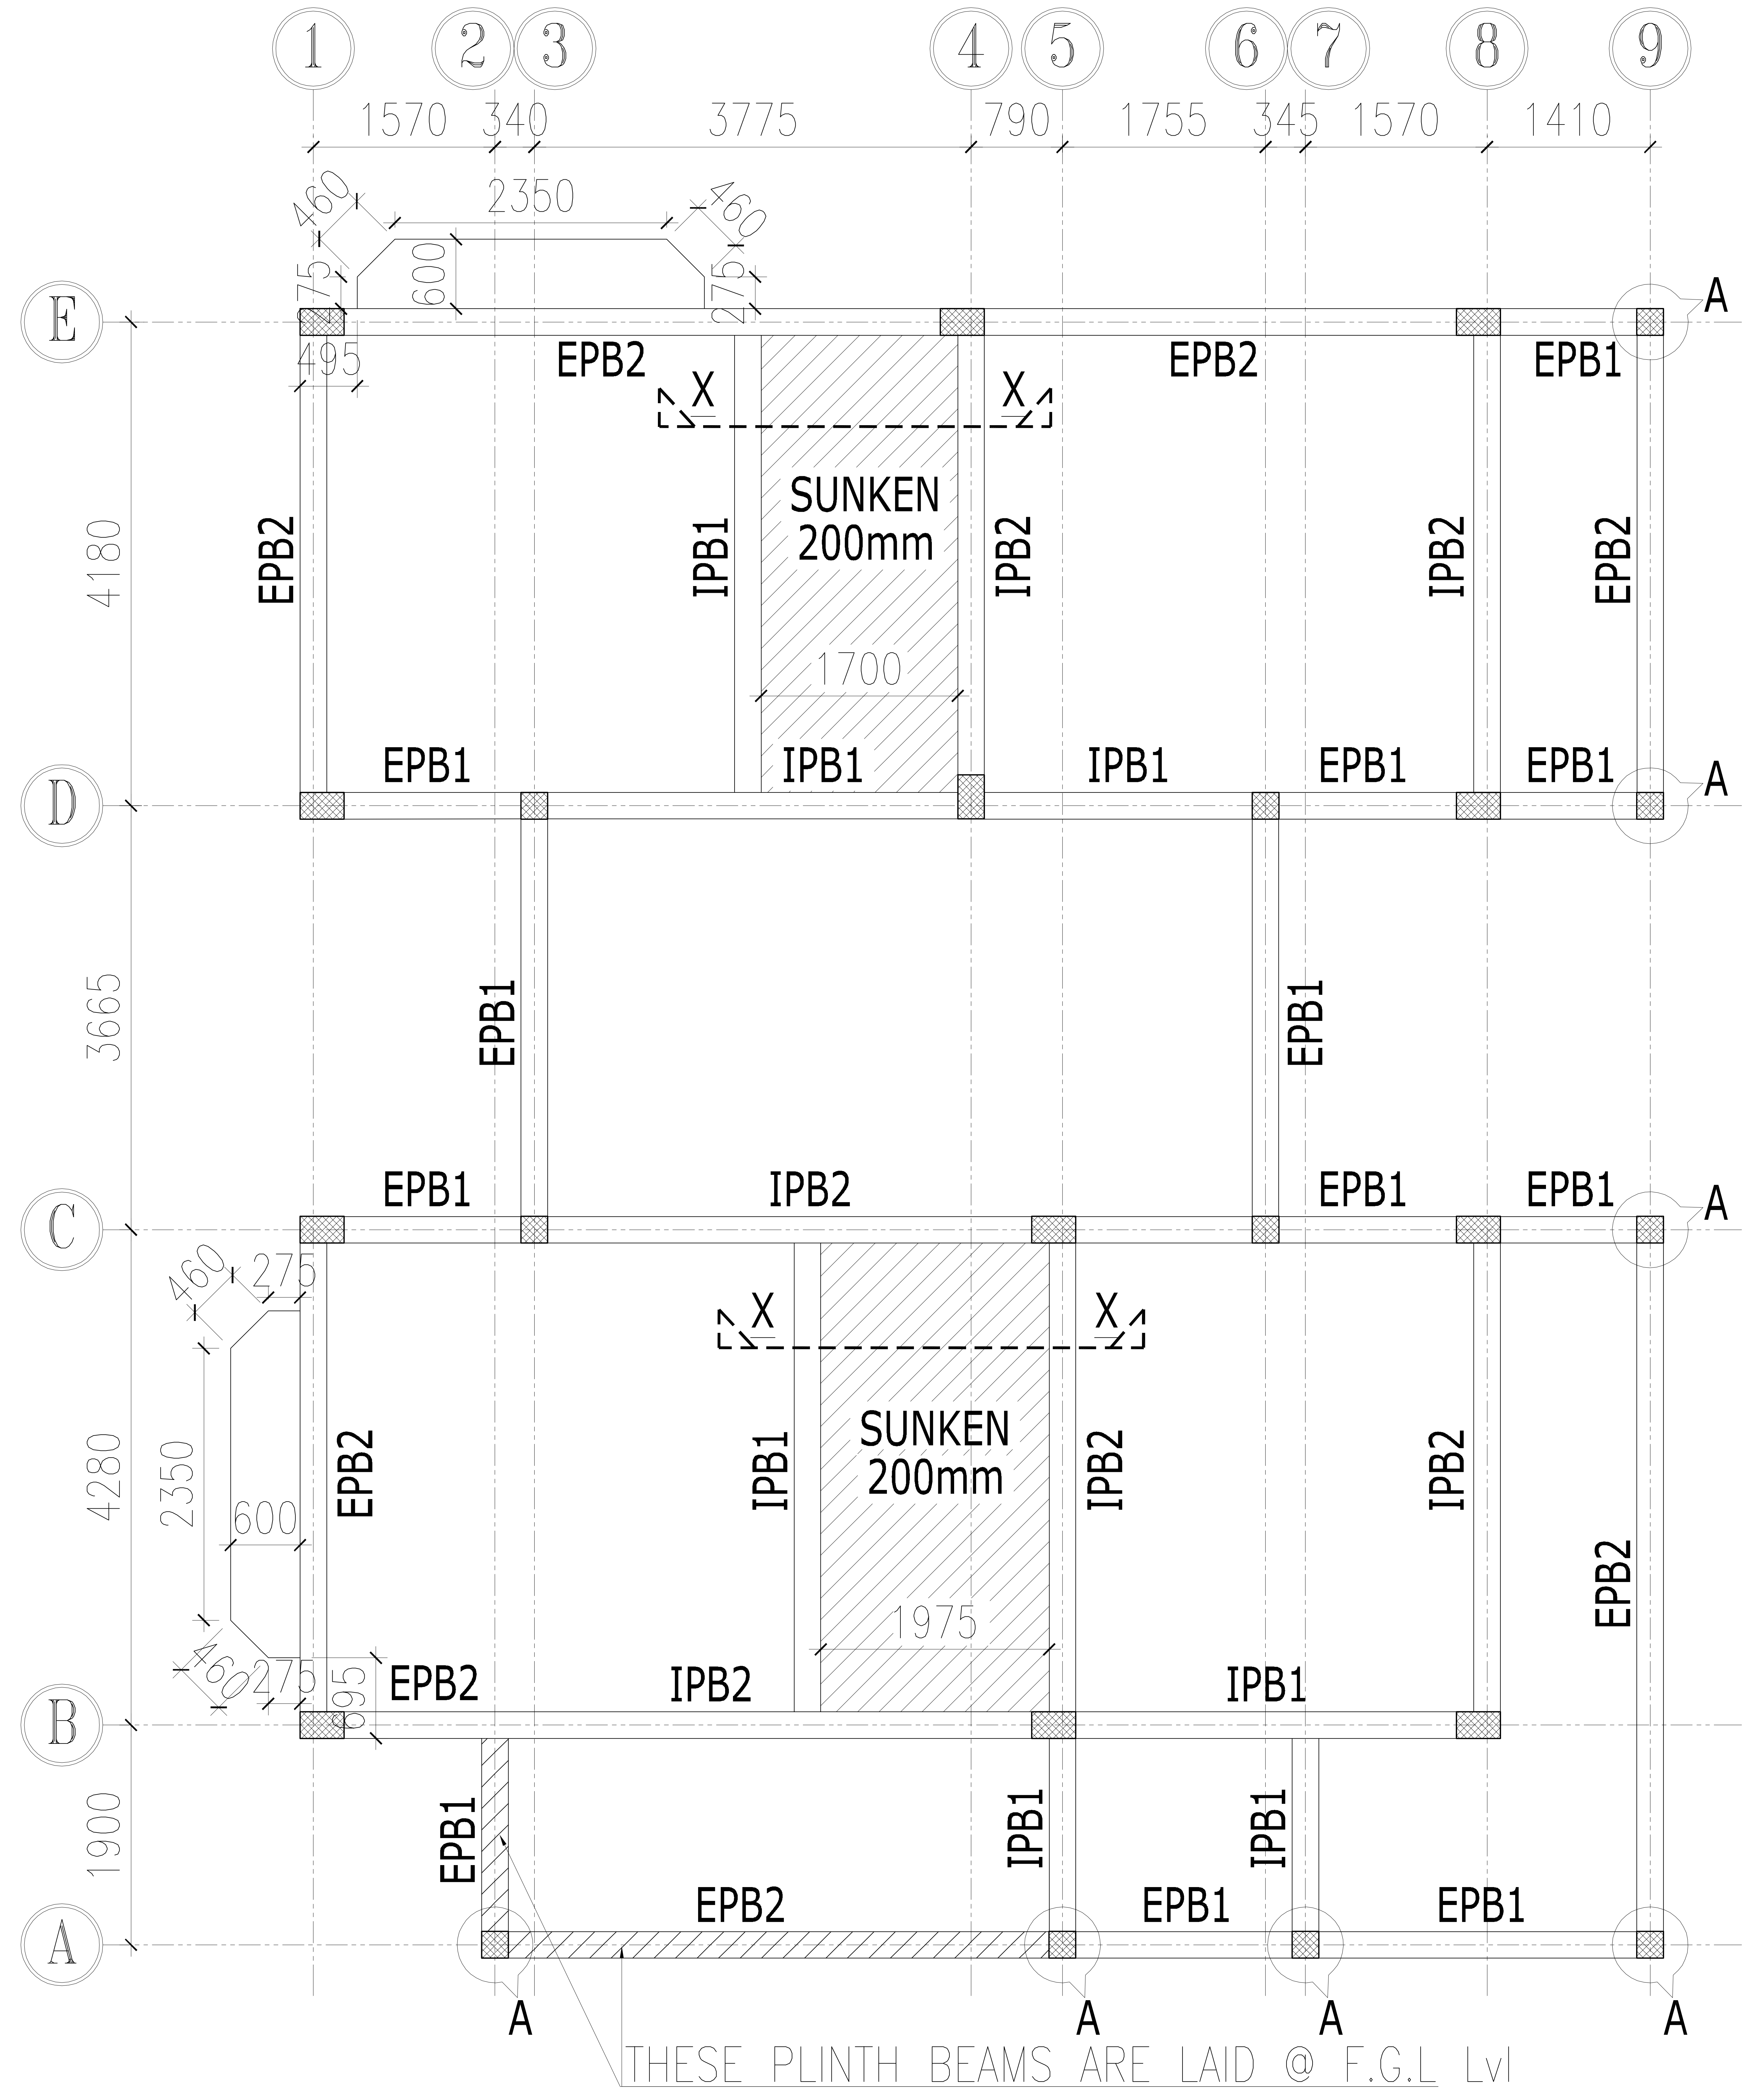
1
2
3
4
5
6
7
8
9
1570
340
3775
790
1755
345
1570
1410
E
D
C
B
A
4180
3665
4280
1900
2350
460
460
600
275
275
495
895
EPB2
EPB2
EPB1
X
X
SUNKEN
200mm
IPB1
IPB2
IPB2
EPB2
EPB2
1700
EPB1
IPB1
IPB1
EPB1
EPB1
EPB1
EPB1
EPB1
IPB2
EPB1
EPB1
SUNKEN
200mm
IPB1
IPB2
IPB2
EPB2
EPB2
1975
IPB2
IPB1
EPB1
IPB1
IPB1
EPB2
EPB1
EPB1
A
THESE PLINTH BEAMS ARE LAID @ F.G.L Lvl

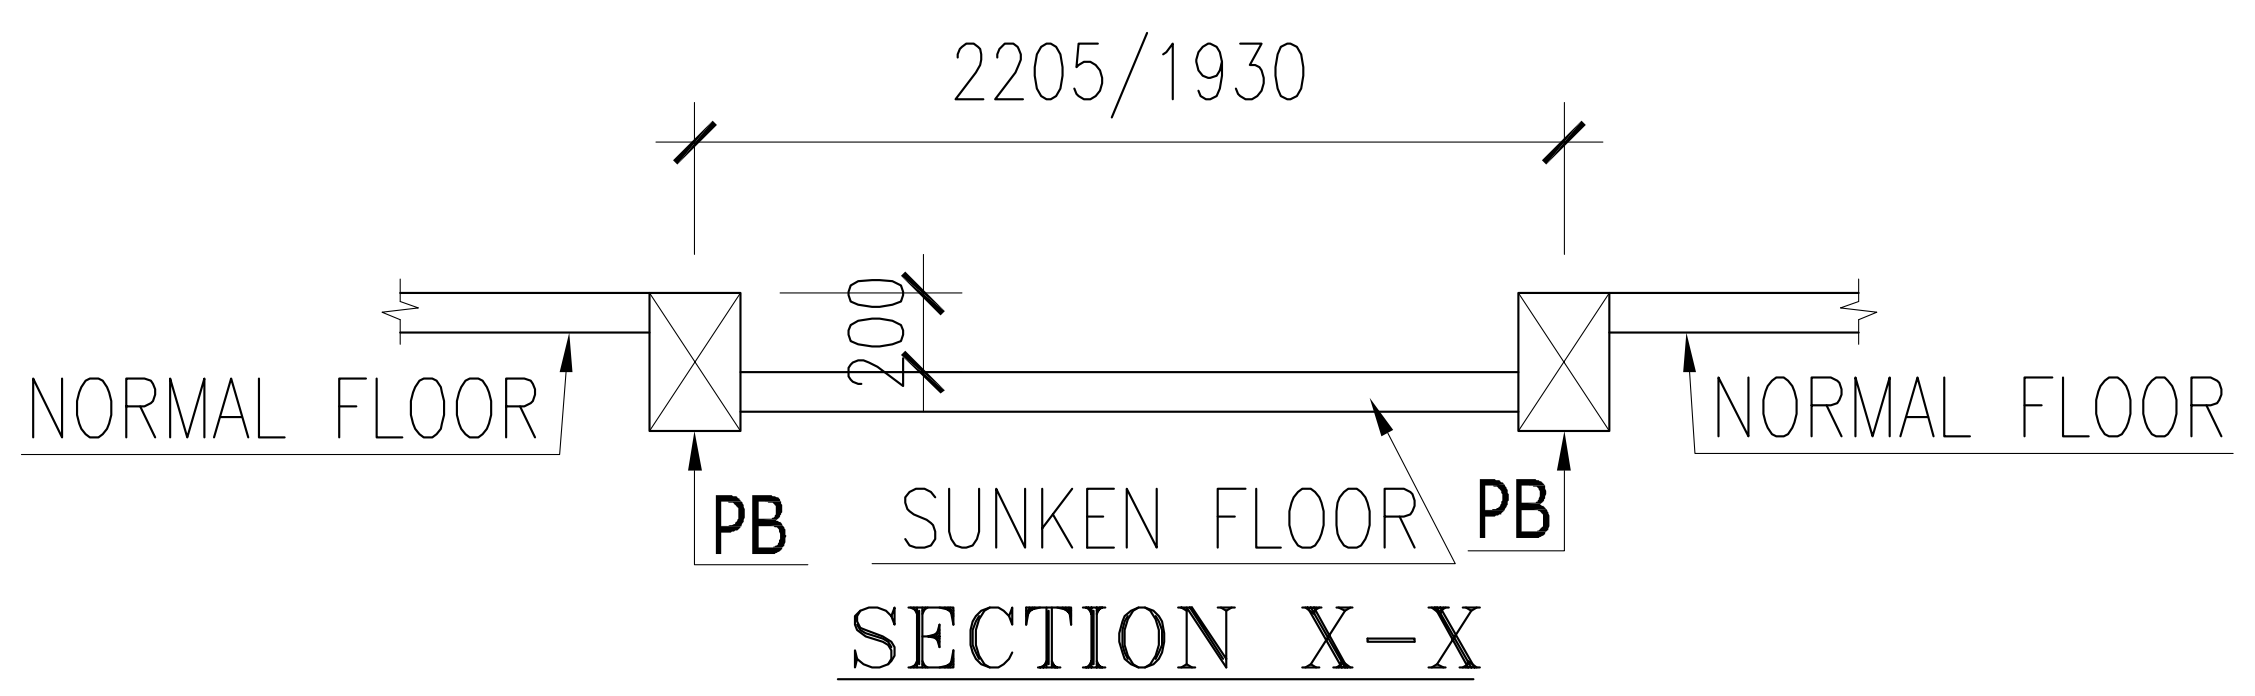
2205/1930
200
NORMAL FLOOR
NORMAL FLOOR
PB
SUNKEN FLOOR
PB

SECTION X–X

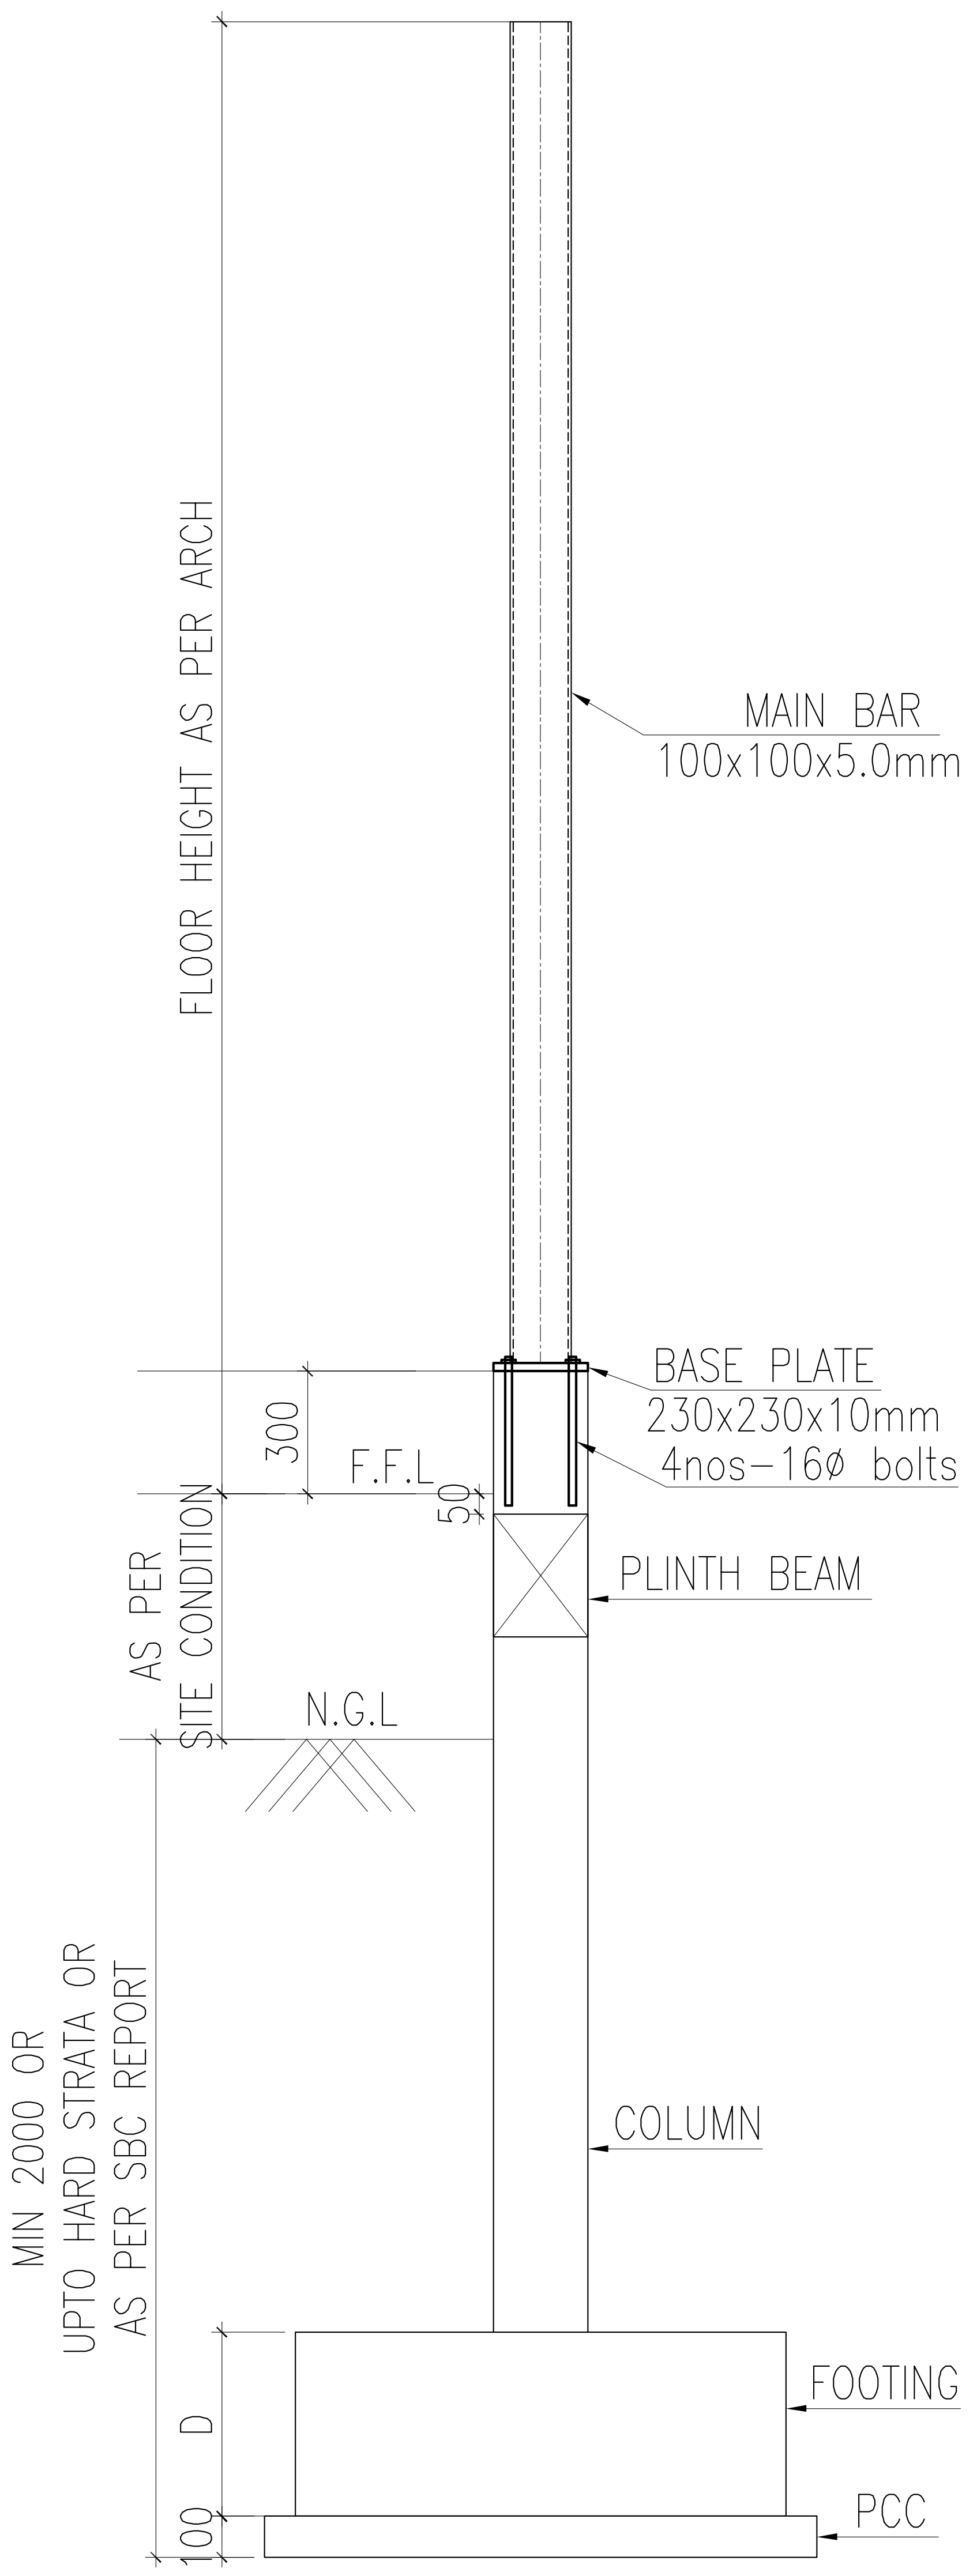
FLOOR HEIGHT AS PER ARCH
MAIN BAR
100x100x5.0mm
300
F.F.L
50
BASE PLATE
230x230x10mm
4nos–16ø bolts
PLINTH BEAM
AS PER
SITE CONDITION
N.G.L
MIN 2000 OR
UPTO HARD STRATA OR
AS PER SBC REPORT
COLUMN
D
FOOTING
100
PCC

DETAIL–A

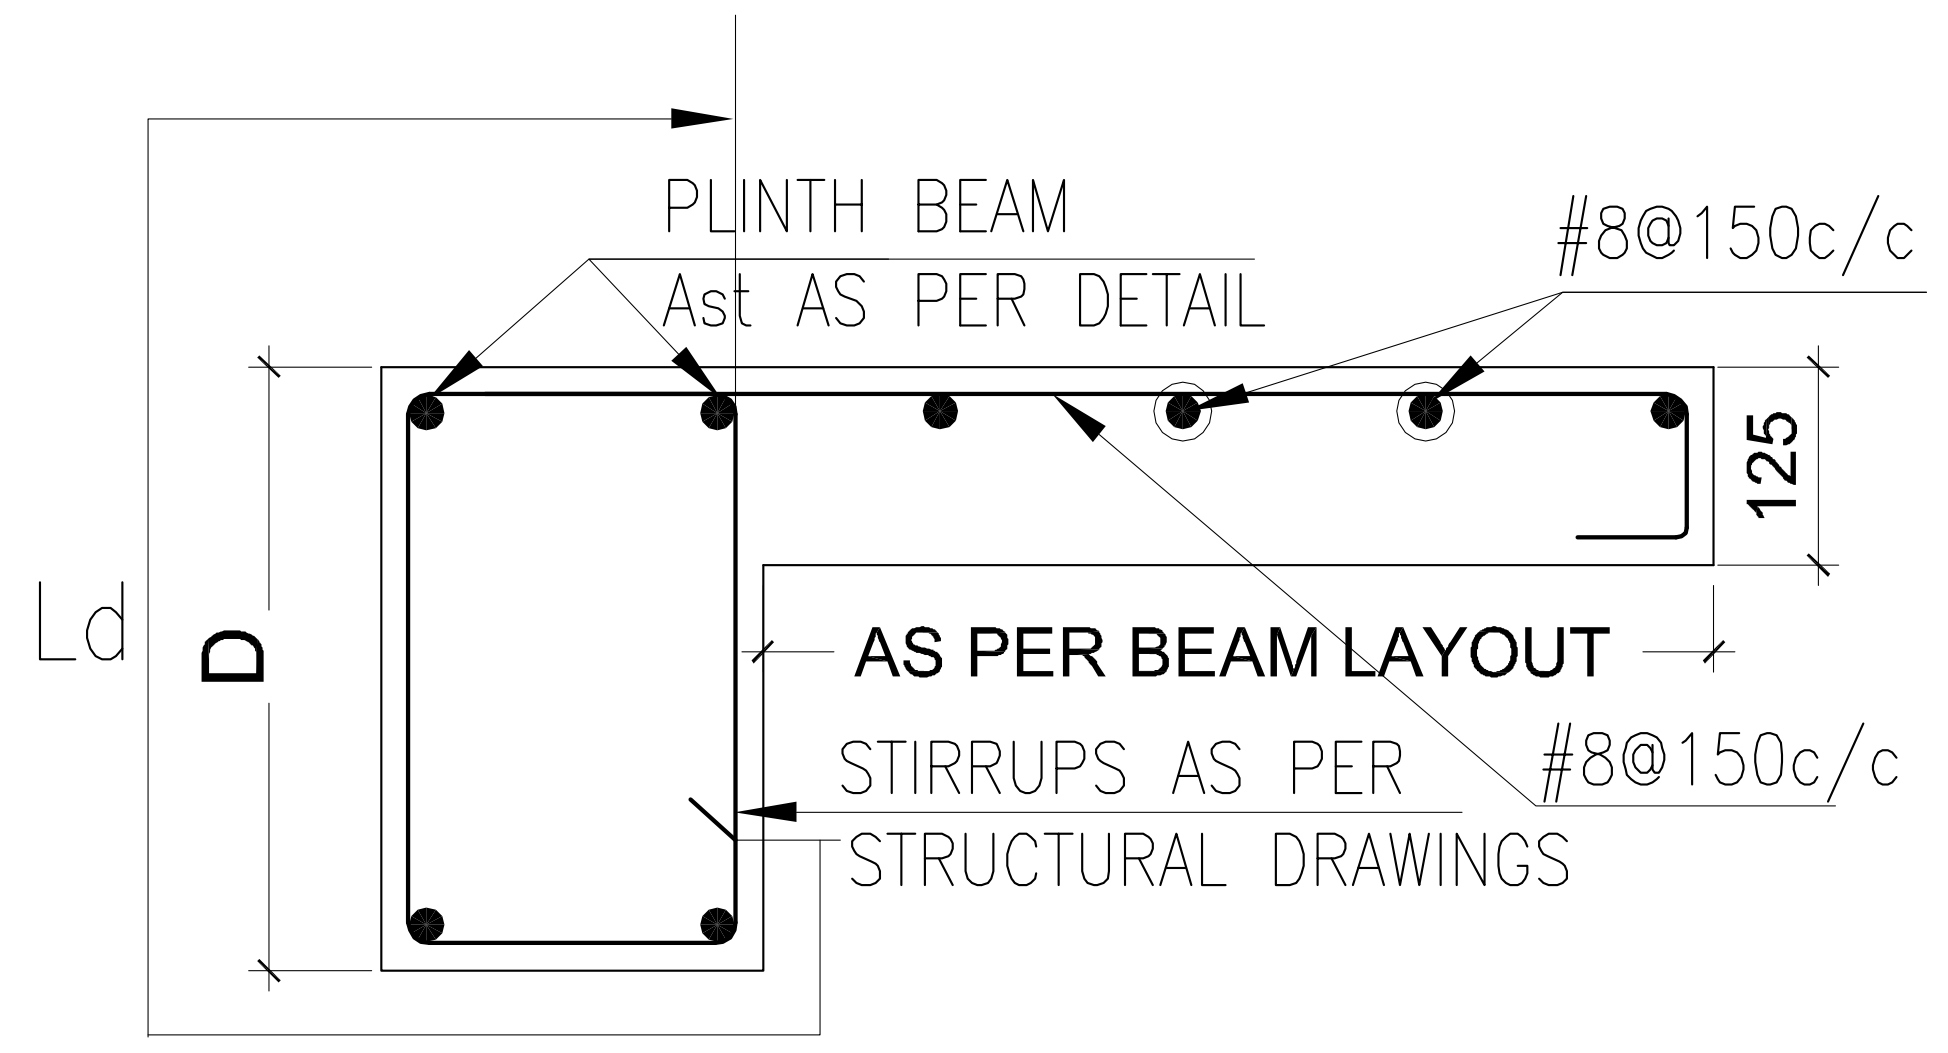
PLINTH BEAM
Ast AS PER DETAIL
#8@150c/c
125
Ld
D
AS PER BEAM LAYOUT
STIRRUPS AS PER
STRUCTURAL DRAWINGS
#8@150c/c

TYPICAL
SLAB PROJECTION DETAILS

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, STRUCTURAL AND SERVICES DRAWINGS. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS AND RESOLVED AS SOON AS POSSIBLE BUT ALWAYS PRIOR TO

DIRECTION:

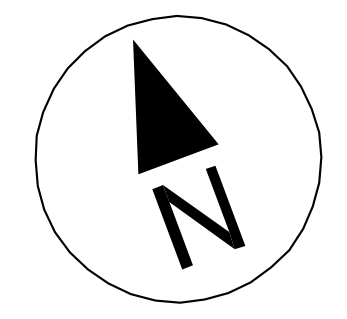

ARCHITECTURAL CONSULTANT:

also. design
a little story of design

STRUCTURAL& MEP CONSULTANTS

JASHRITHA ASSOCIATES
AND MEP PLANNERS
4th FLOOR(4B), HIG 129, KPHB COLONY, KUKATPALLY,
(SUB BRANCH:PR NAGAR ERRAGADDA.)
HYDERABAD 500072, TELANGANA, INDIA
Phone : 9700441106.
E-mail : jashreyansh.consultatns@gmail.com
& jashritha.mep@gmail.com

PROJECT:

ANKURA HOMES_THE WOODS
AT KEESARAGUTTA

DRAWING TITLE:

1215_EAST VILLA
PLINTH BEAM LAYOUT

DESIGN ENGG : AJAY	APPROVED :
SCALE : NTS	DRAWN : PK
DATE : 23-09-2026	CHECKED : PRADEEP
DRAWING NO: SD-03	REV.NO:

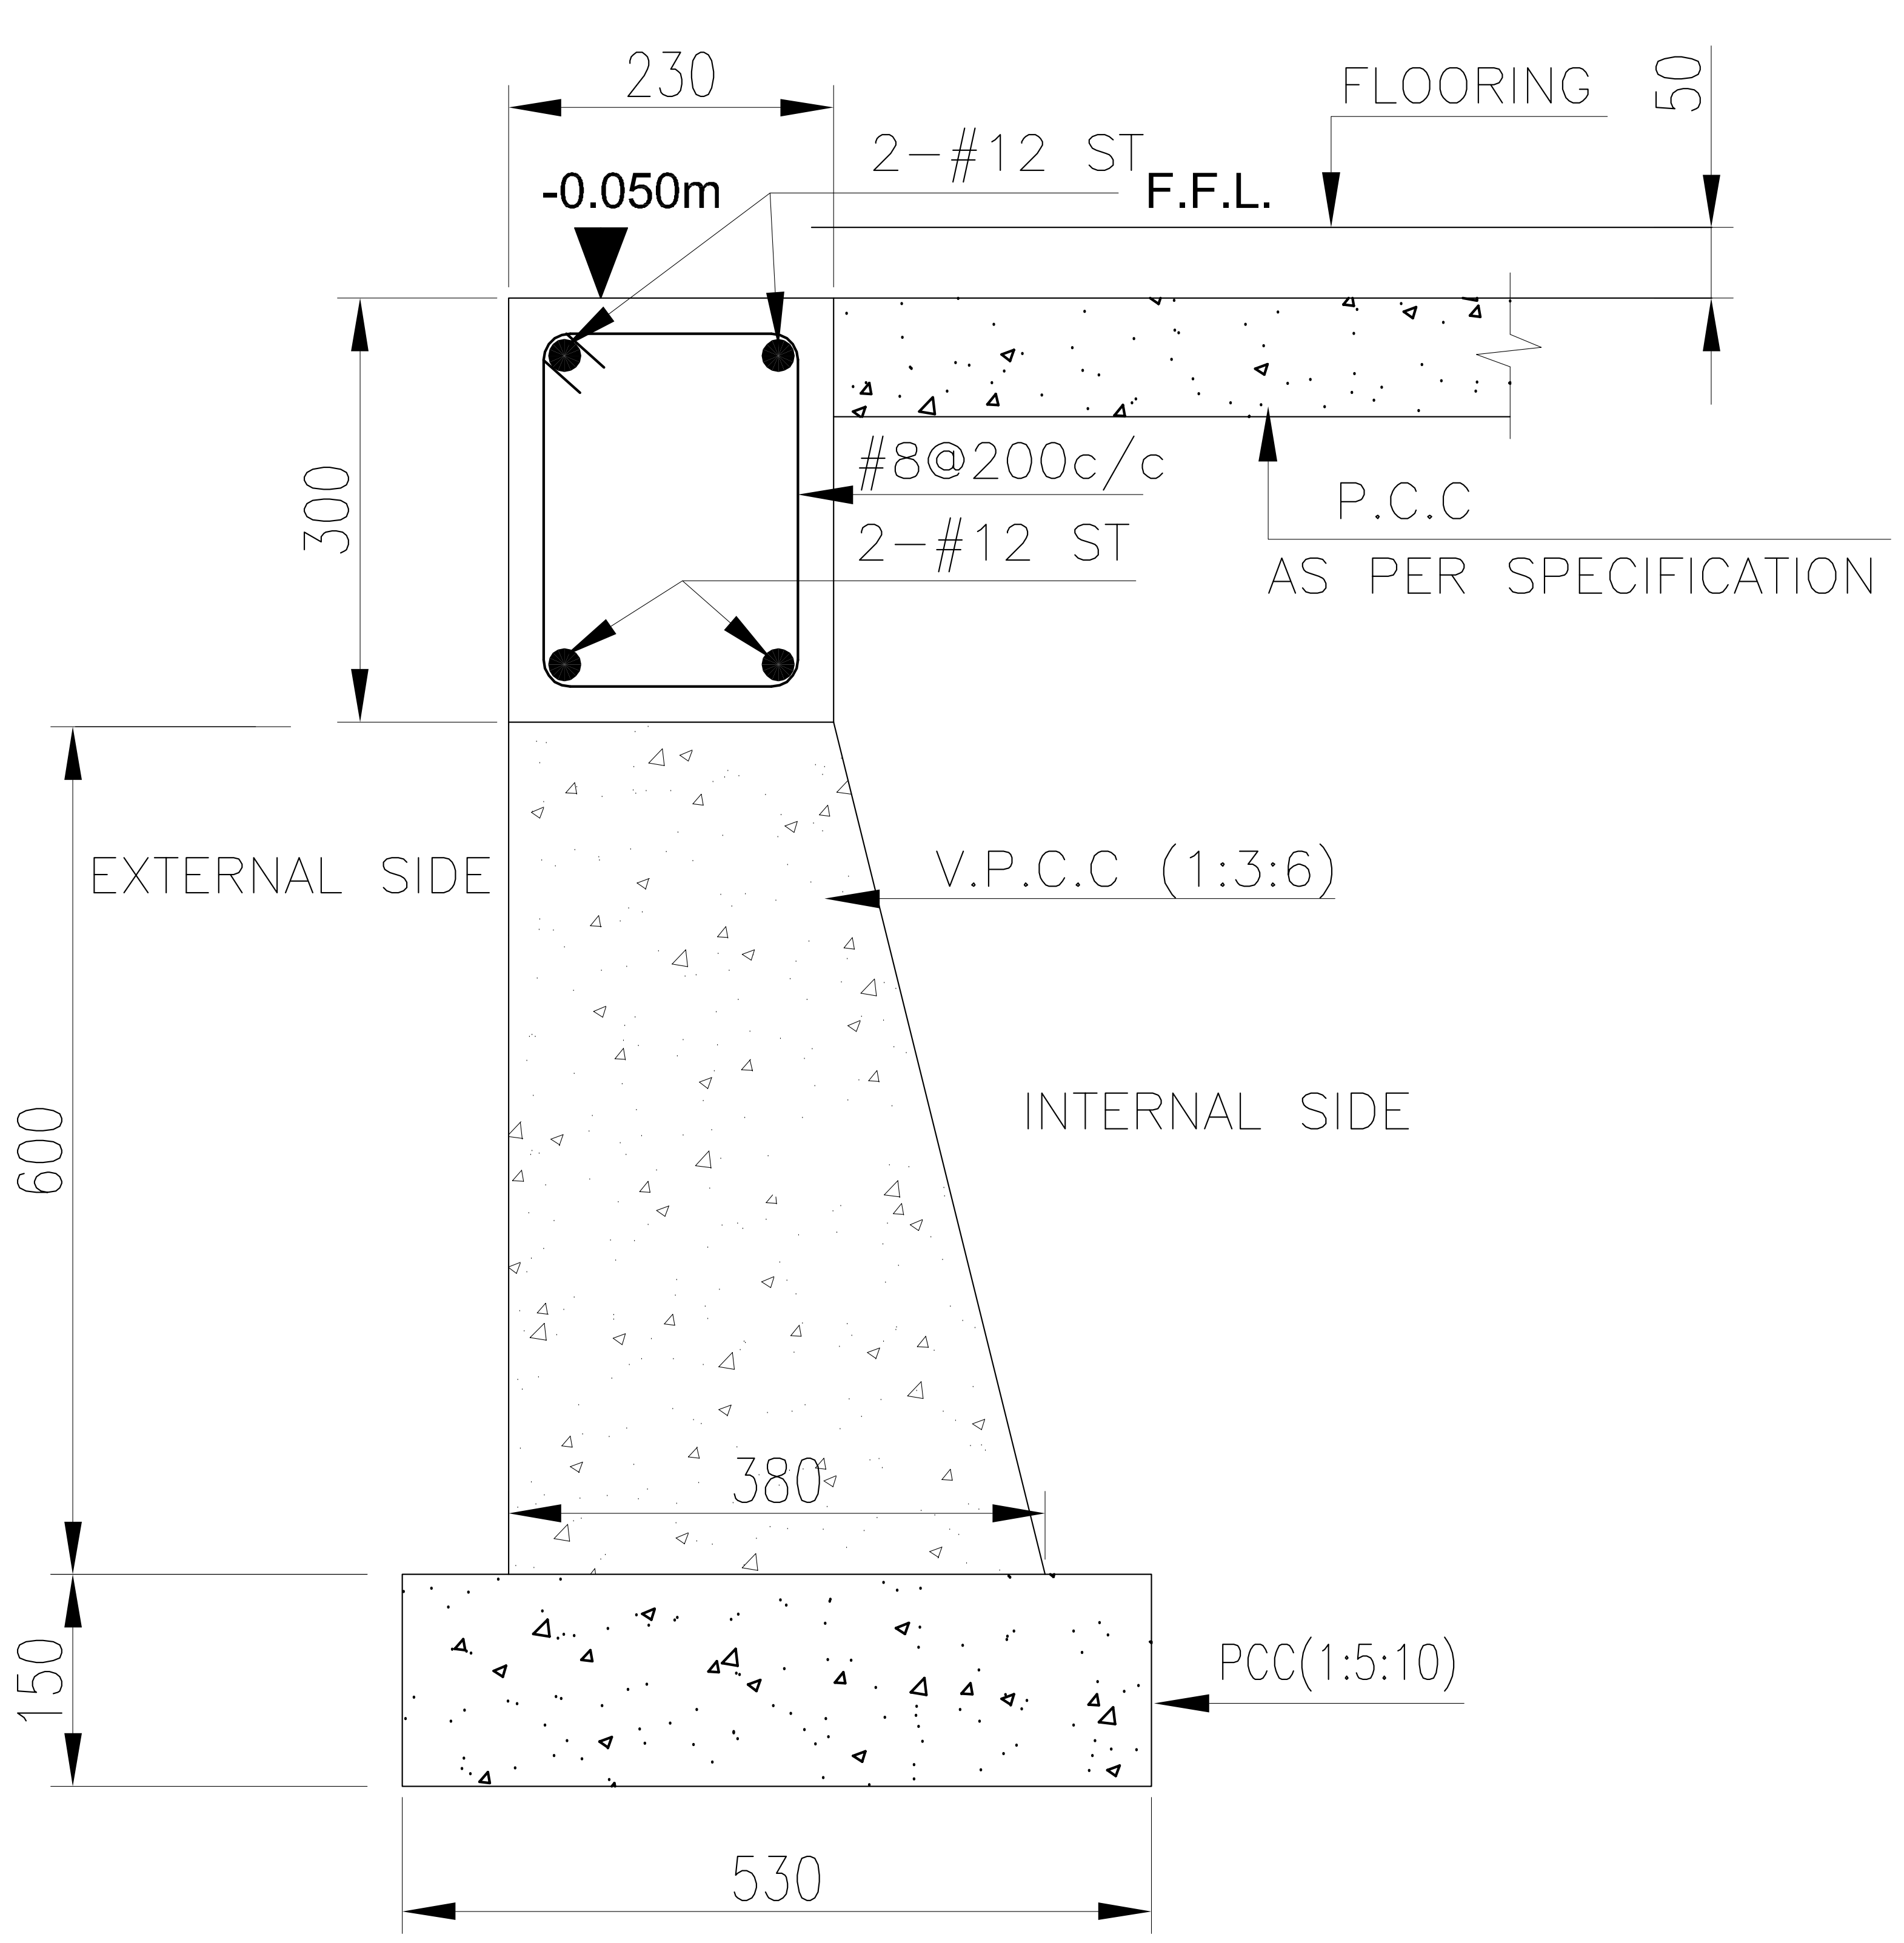
230
-0.050m
2-#12 ST
F.F.L.
FLOORING
50
300
#8@200c/c
2-#12 ST
P.C.C
AS PER SPECIFICATION
EXTERNAL SIDE
V.P.C.C (1:3:6)
INTERNAL SIDE
600
380
150
PCC(1:5:10)
530

EPB1

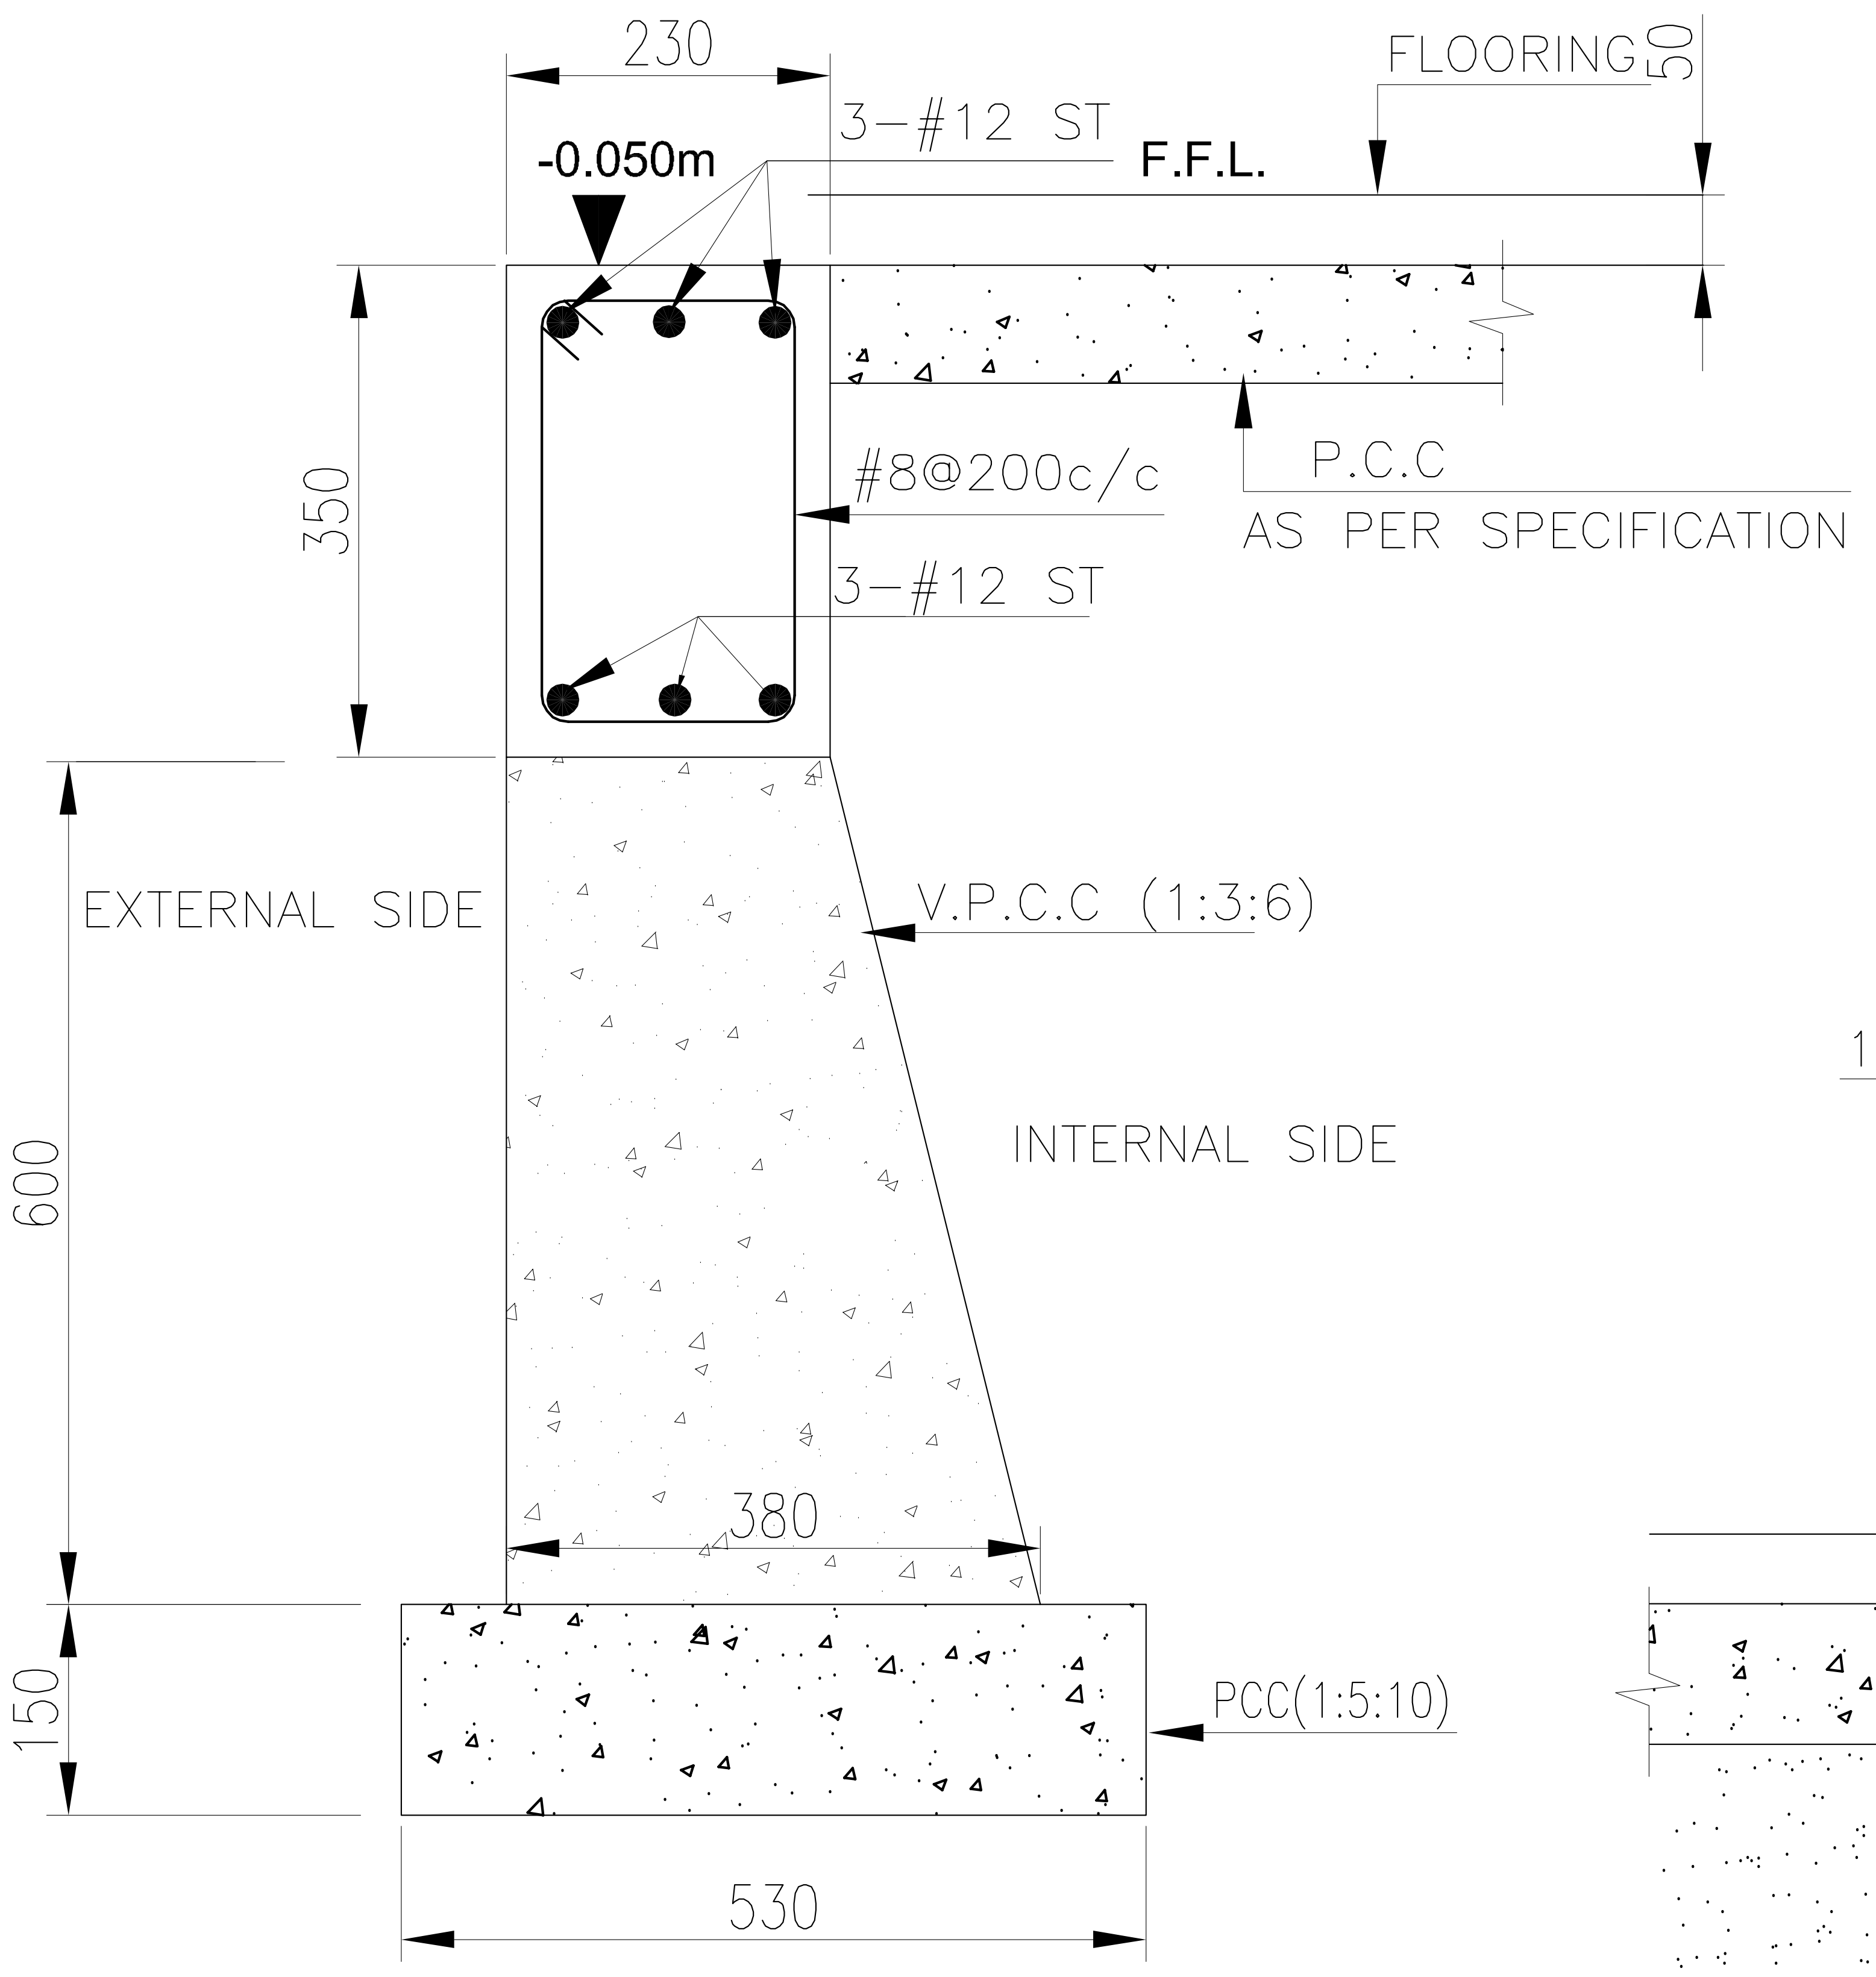
230
-0.050m
3-#12 ST
F.F.L.
FLOORING
50
350
#8@200c/c
3-#12 ST
P.C.C
AS PER SPECIFICATION
EXTERNAL SIDE
V.P.C.C (1:3:6)
INTERNAL SIDE
600
380
150
PCC(1:5:10)
530

EPB2

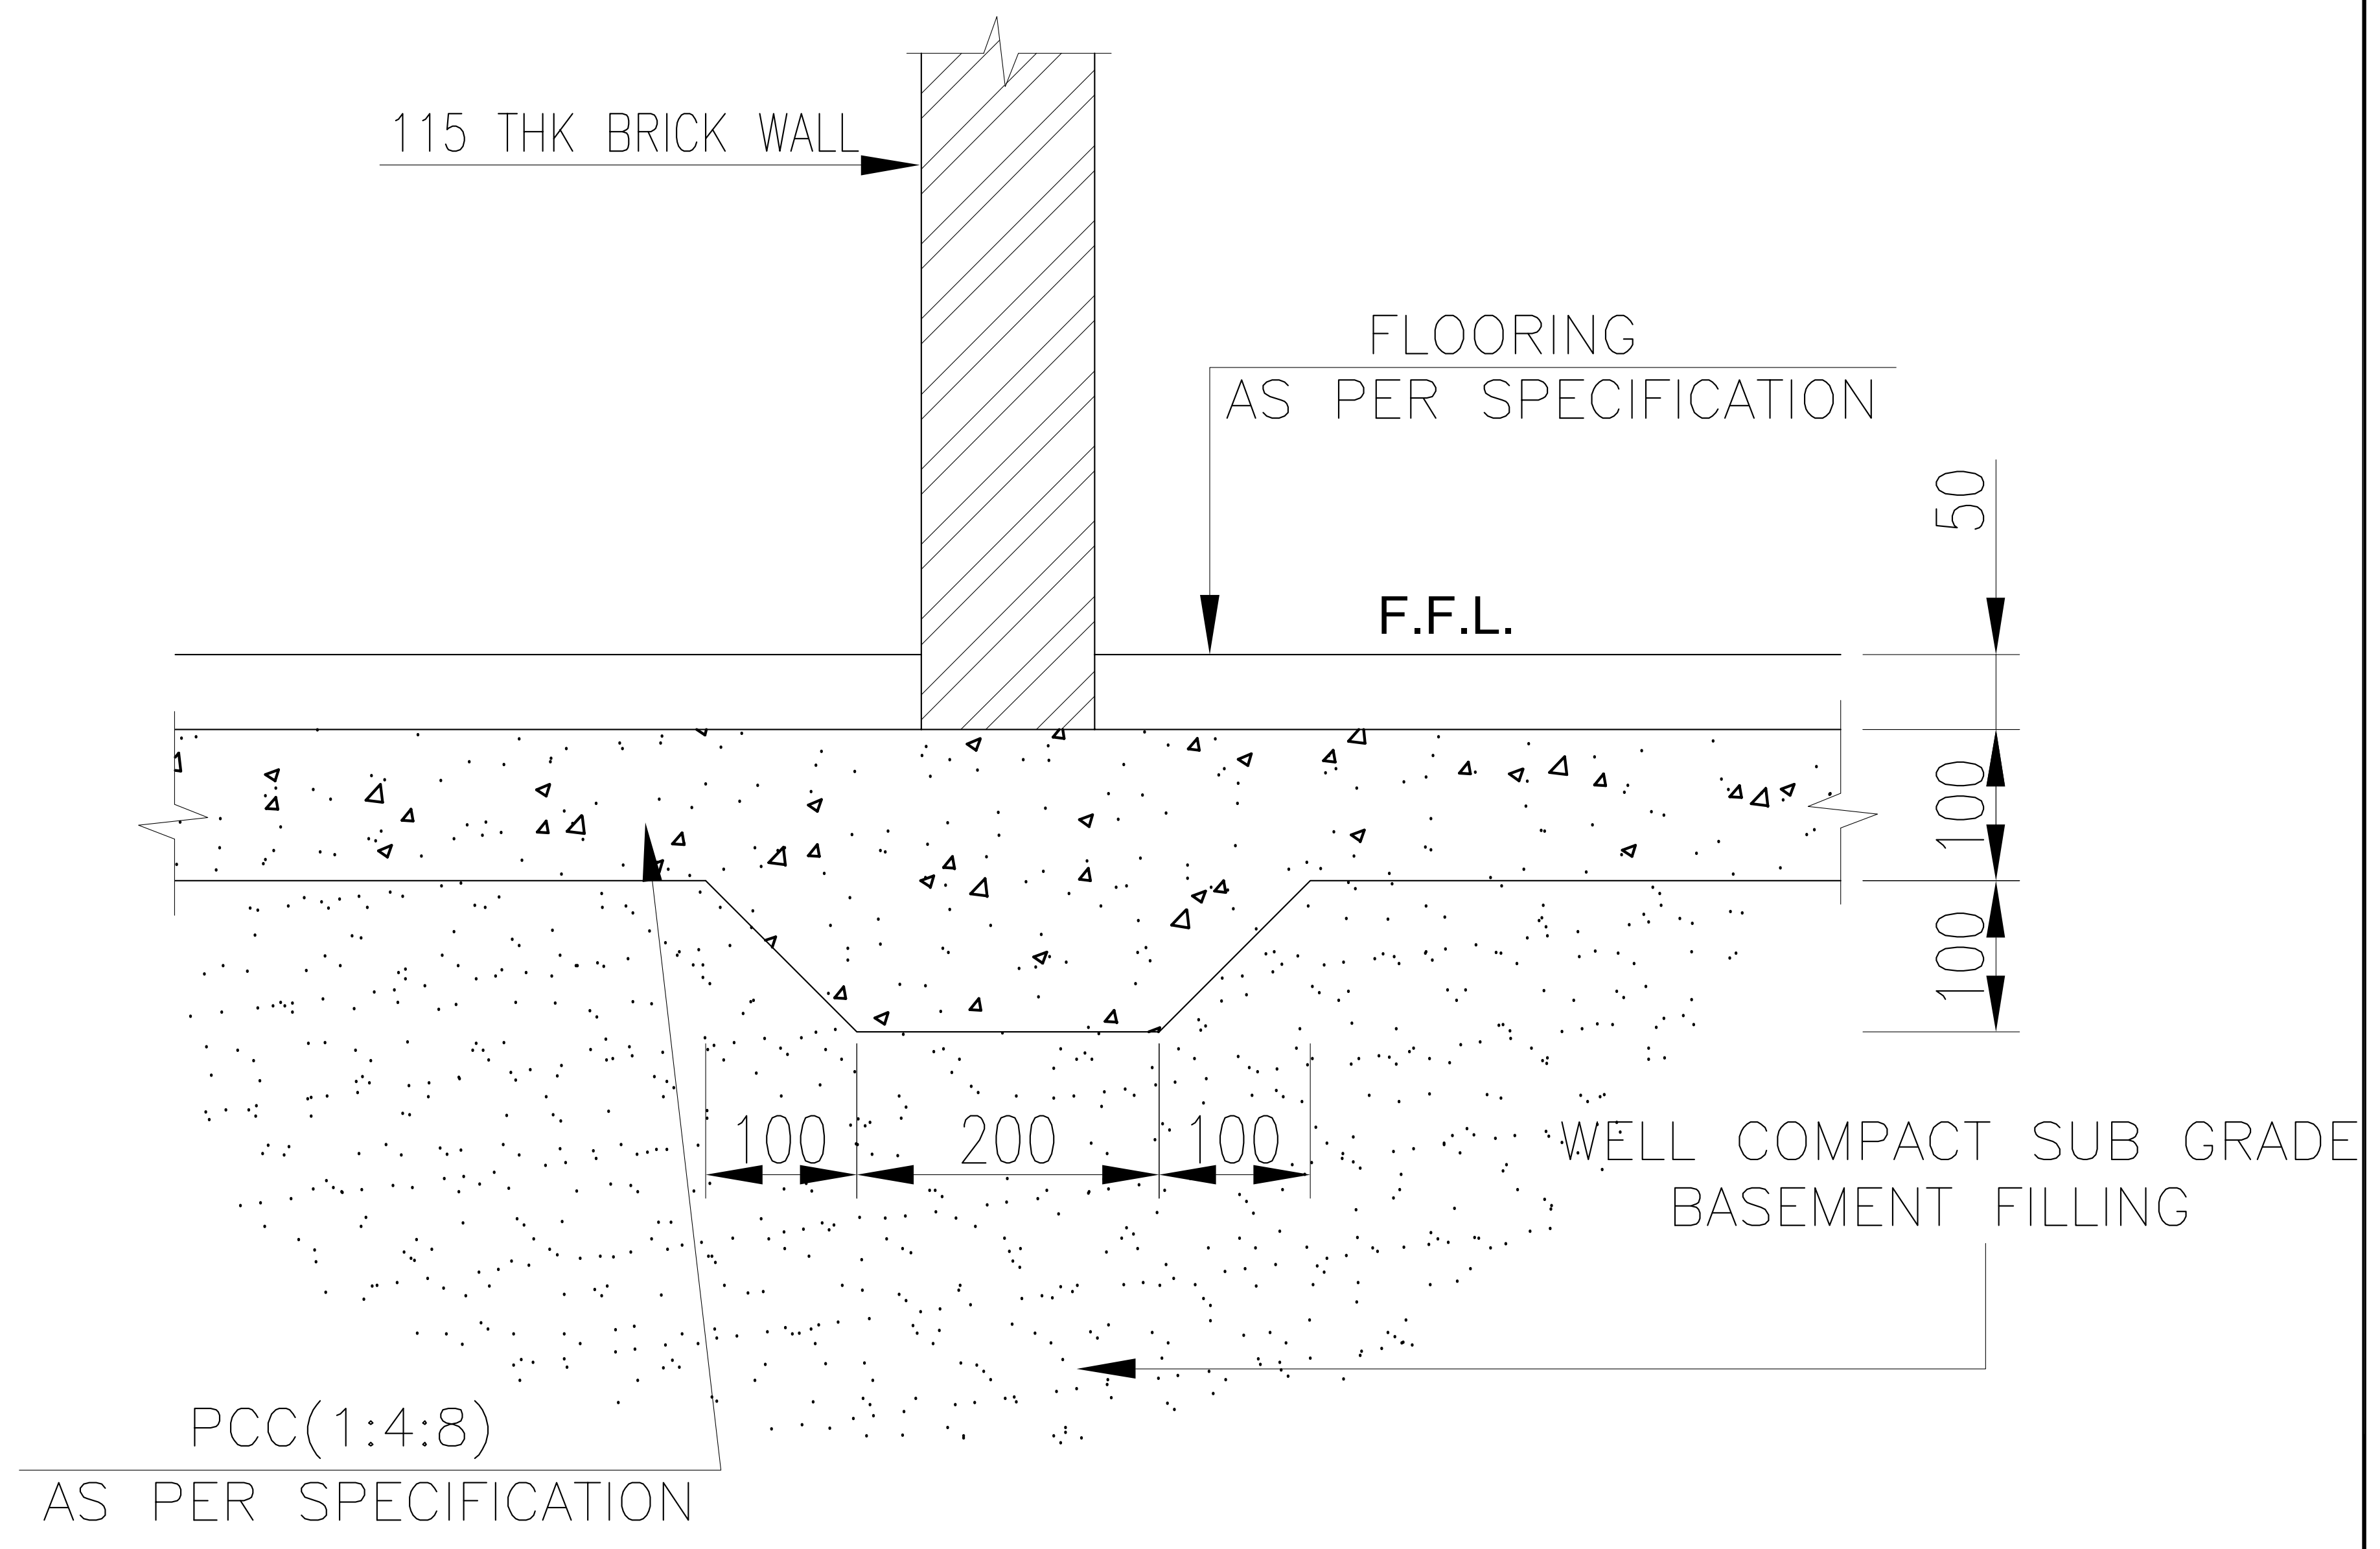
115 THK BRICK WALL
FLOORING
AS PER SPECIFICATION
50
F.F.L.
100
100
100
200
100
WELL COMPACT SUB GRADE
BASEMENT FILLING
PCC(1:4:8)
AS PER SPECIFICATION

FOUNDATION DETAIL UNDER 115mm THICK BRICK WALL

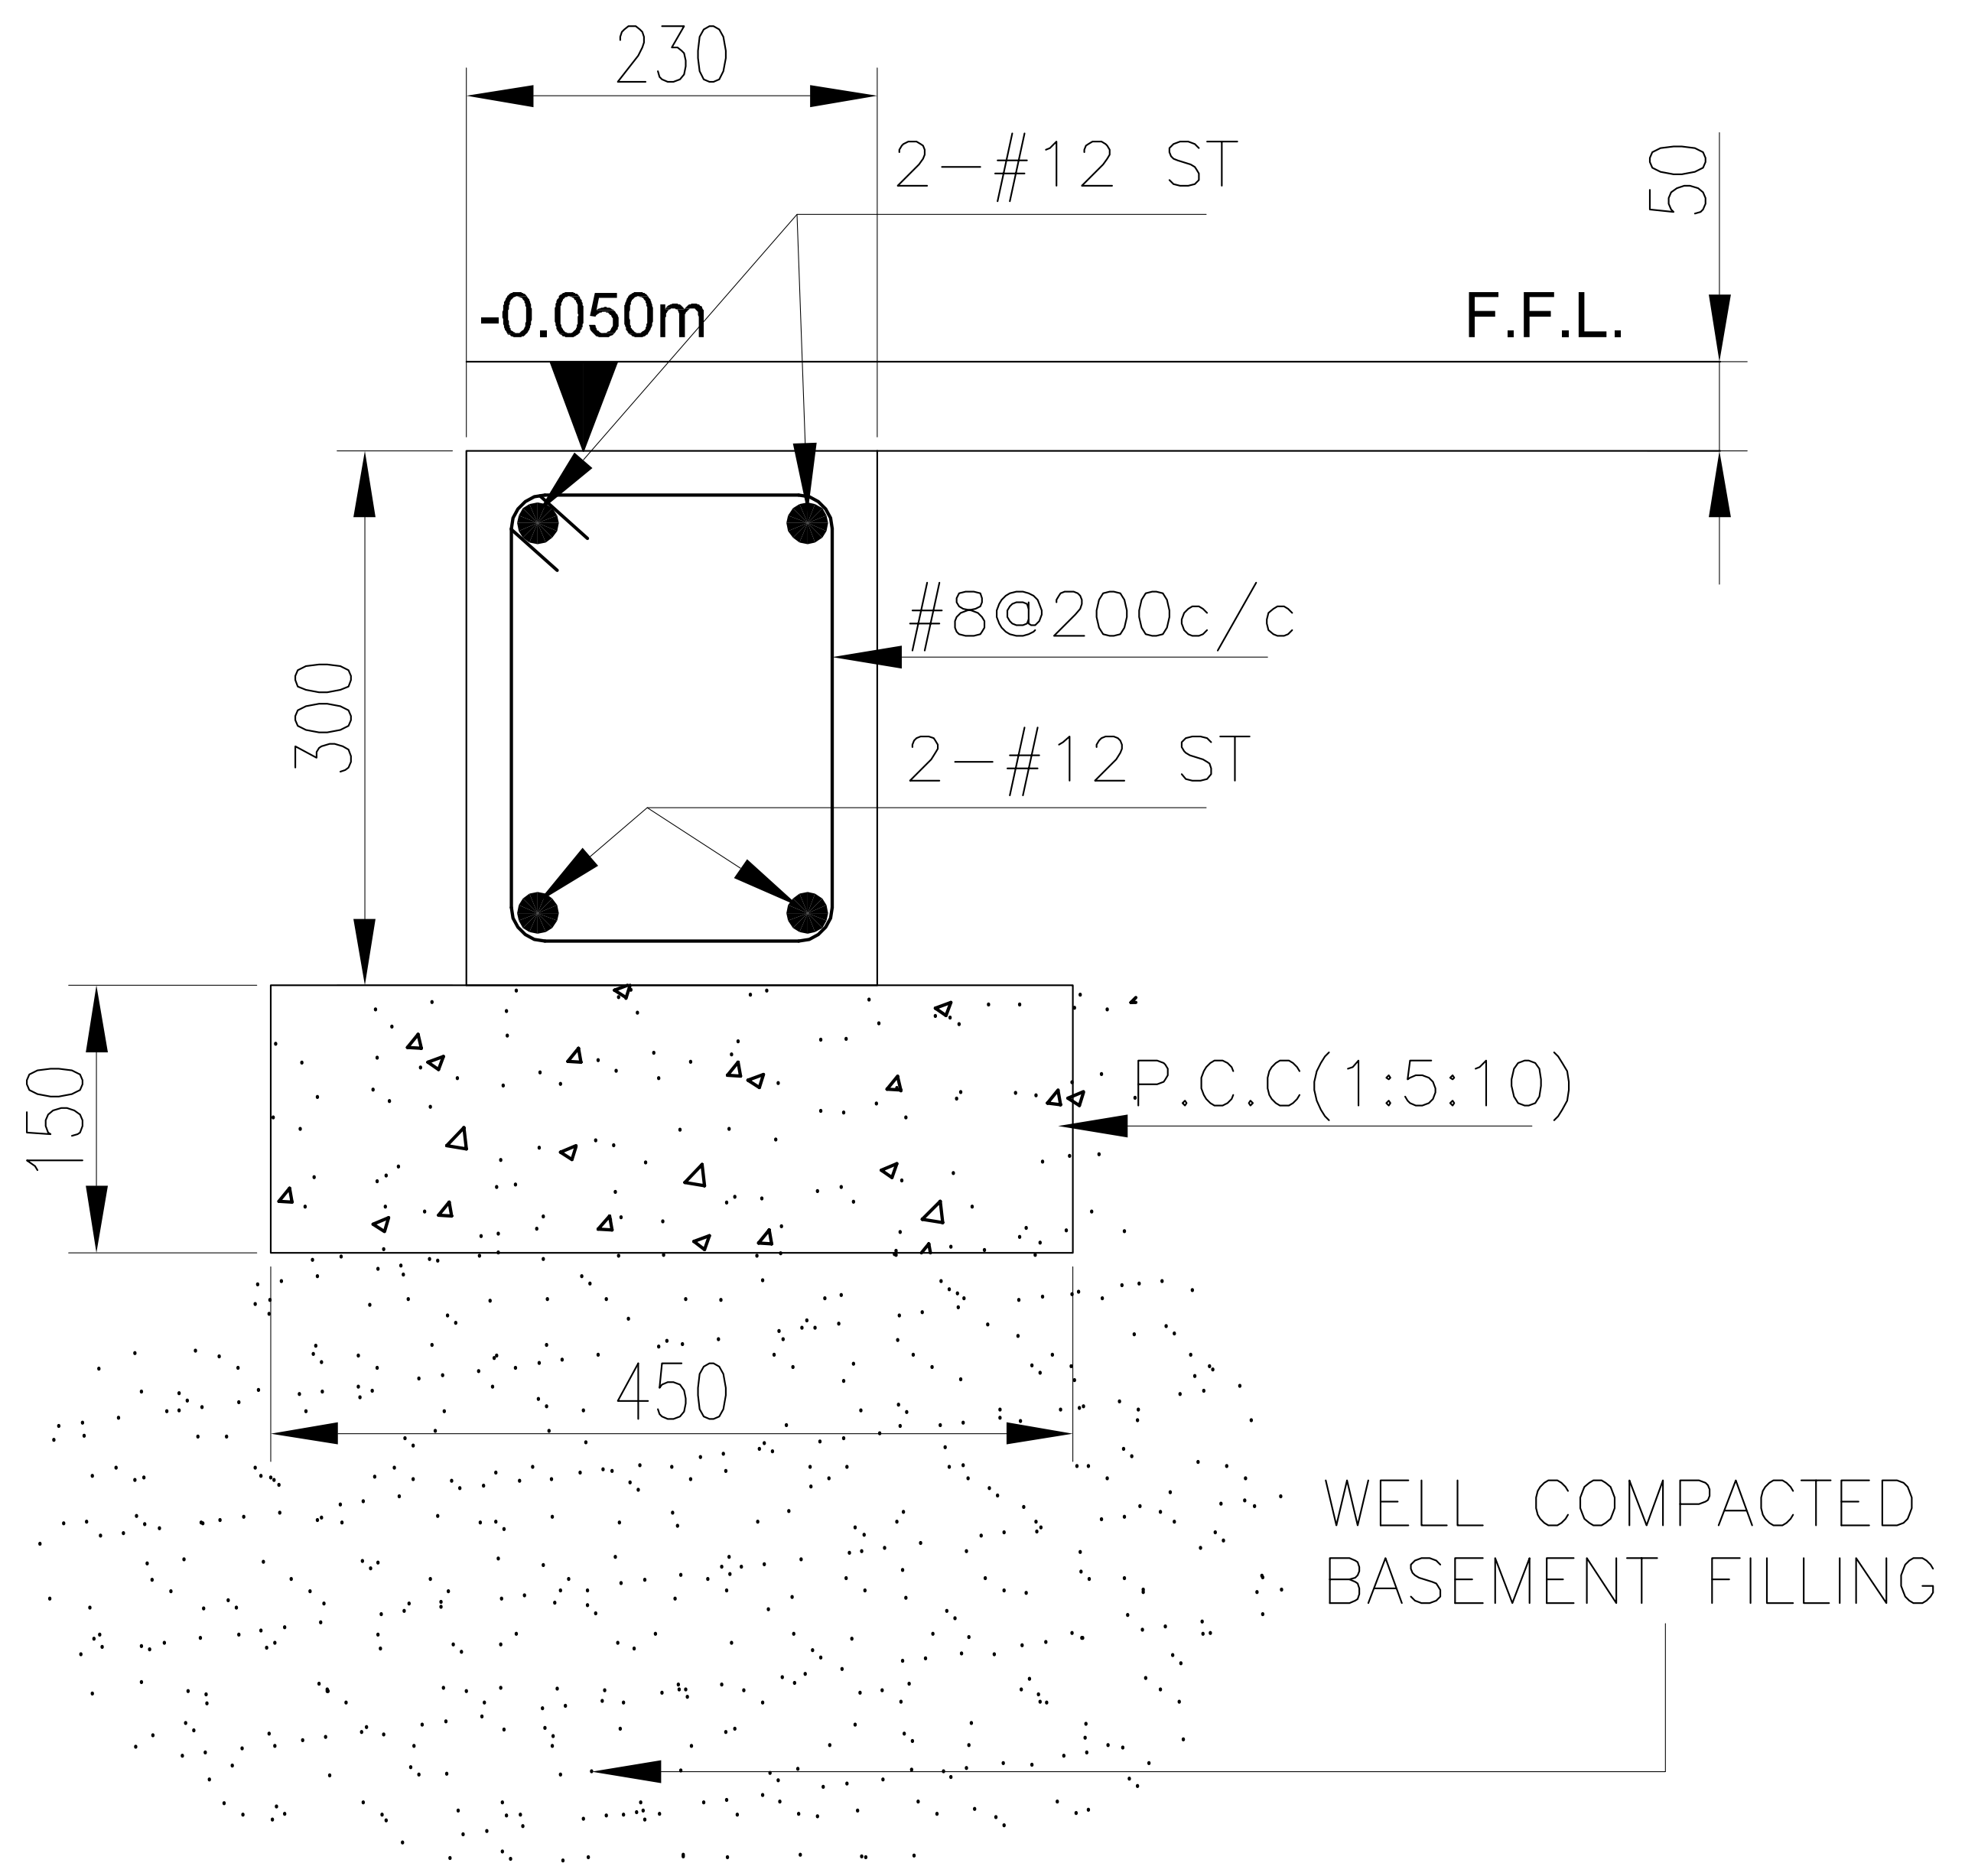
230
2-#12 ST
50
-0.050m
F.F.L.
300
#8@200c/c
2-#12 ST
150
P.C.C(1:5:10)
450
WELL COMPACTED
BASEMENT FILLING

IPB1

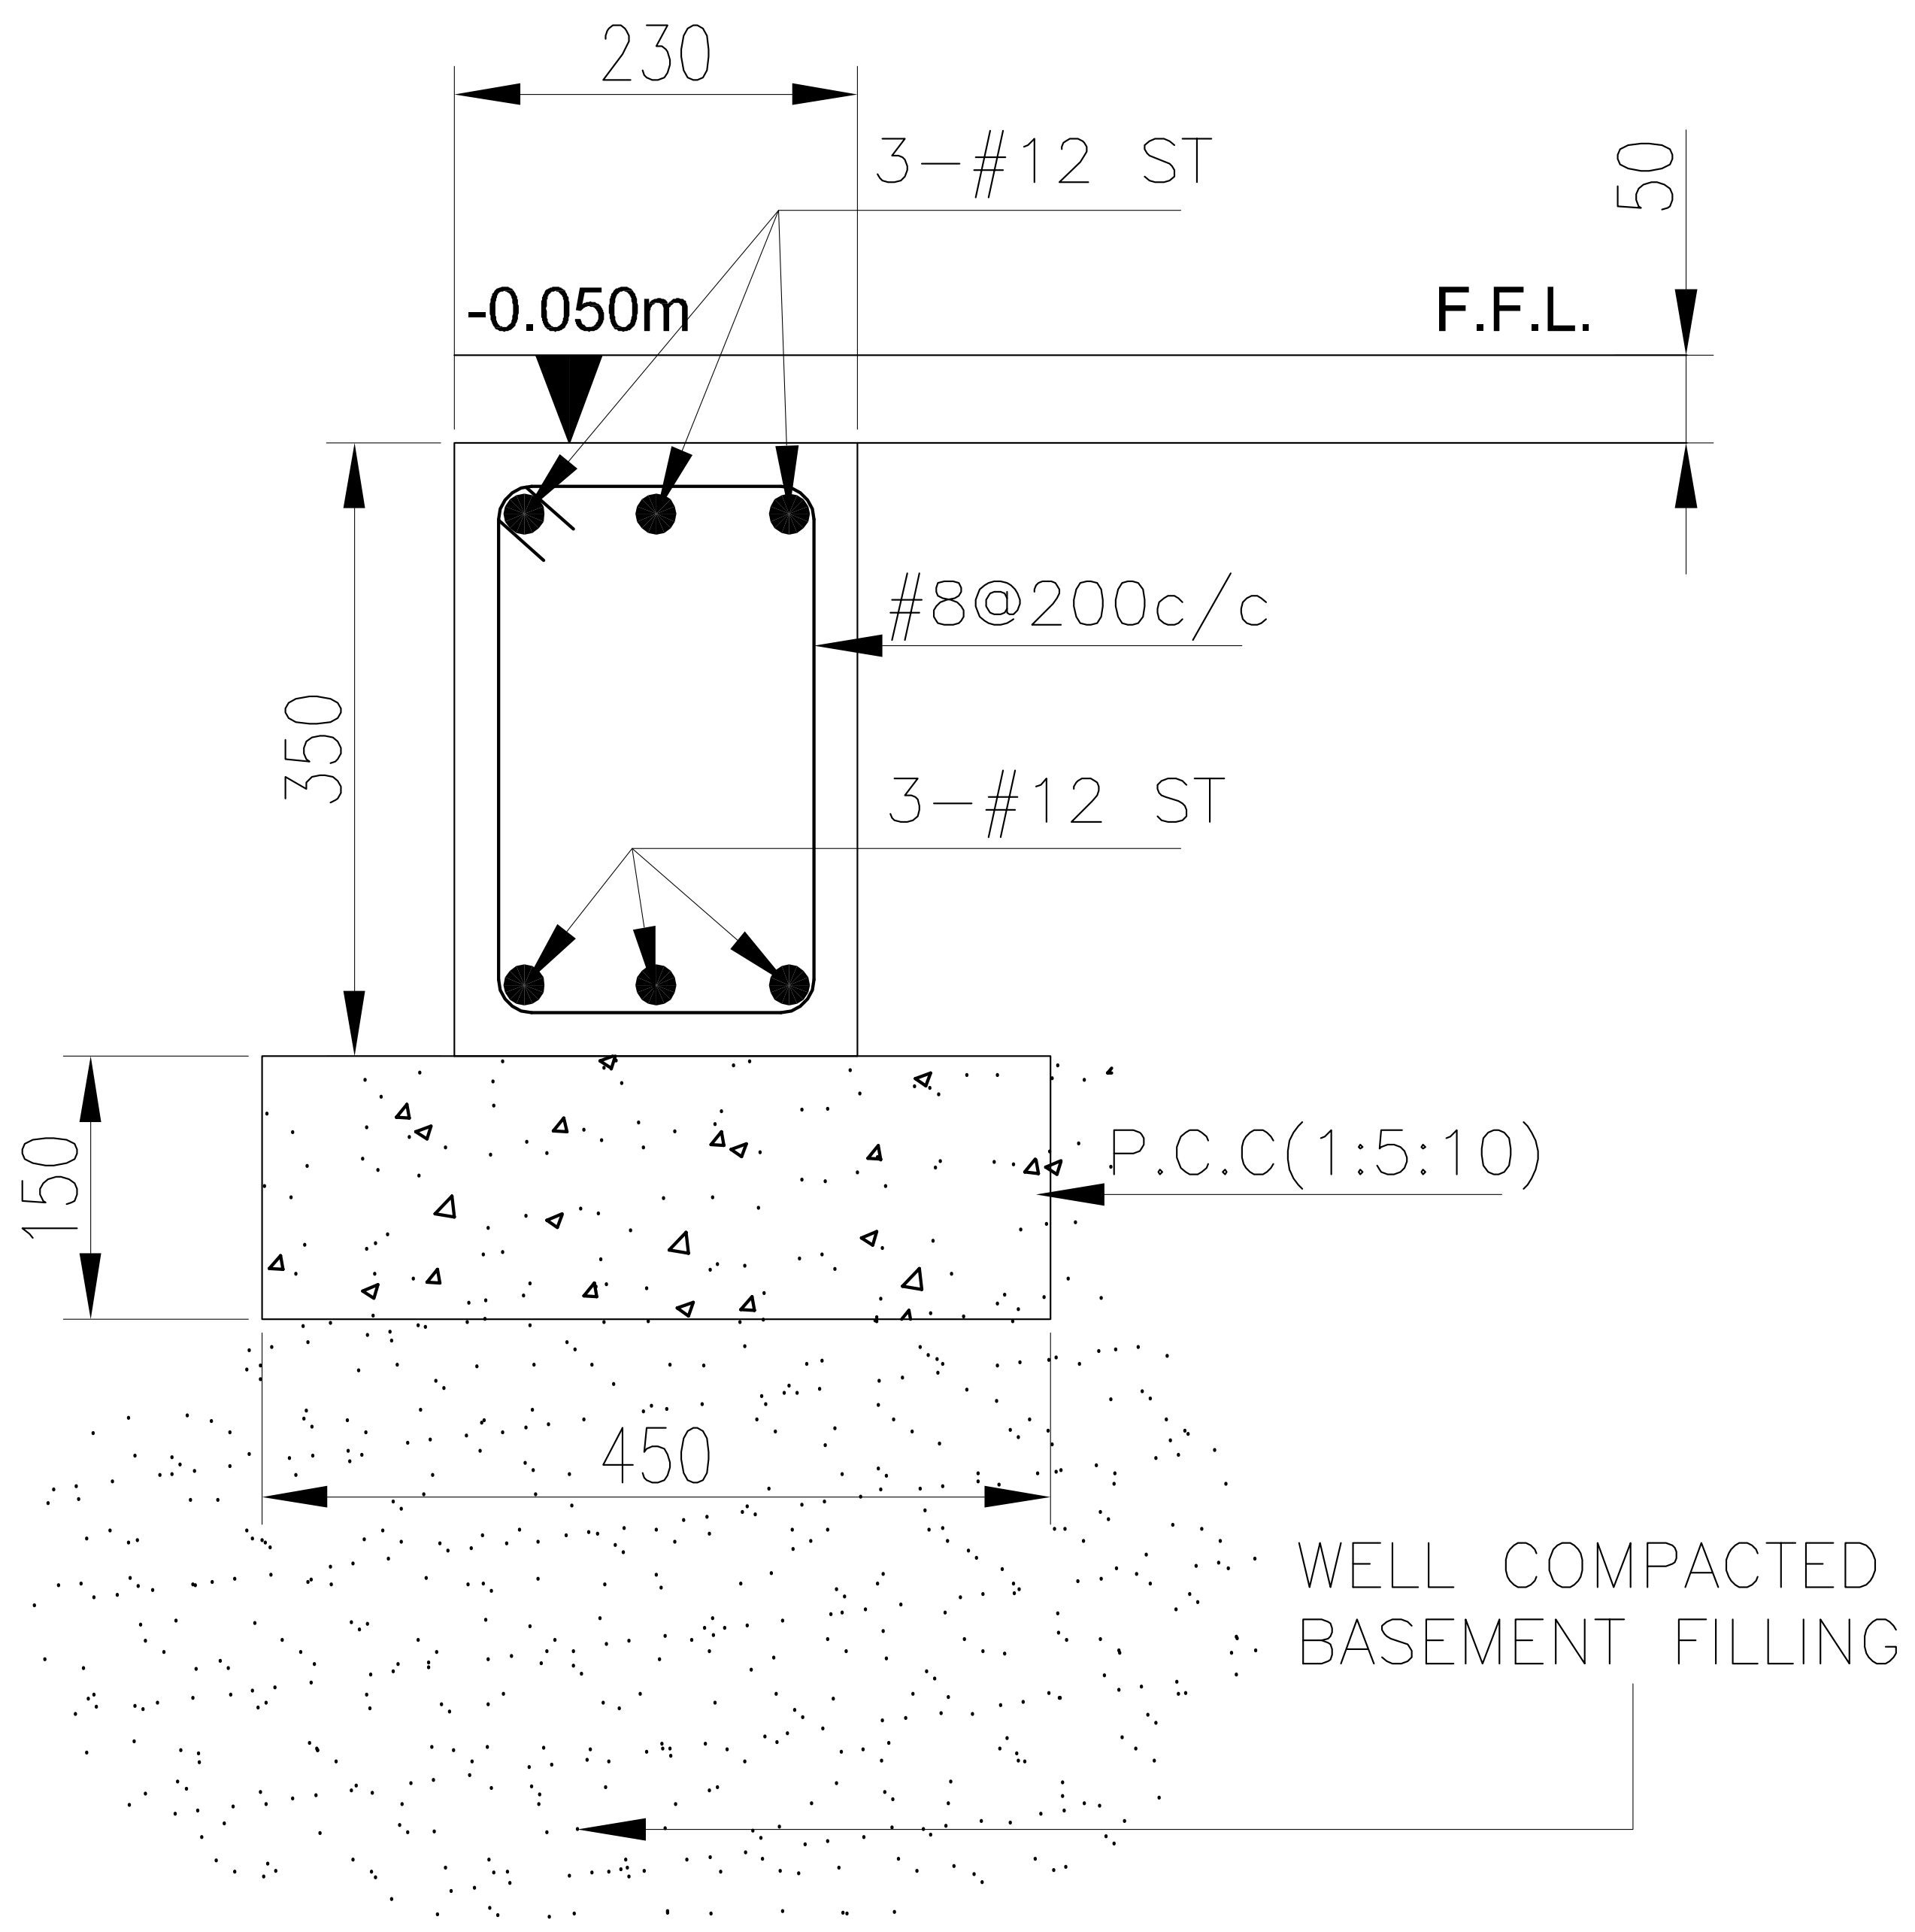
230
3-#12 ST
50
-0.050m
F.F.L.
350
#8@200c/c
3-#12 ST
150
P.C.C(1:5:10)
450
WELL COMPACTED
BASEMENT FILLING

IPB2

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, STRUCTURAL AND SERVICES DRAWINGS. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS AND RESOLVED AS SOON AS POSSIBLE BUT ALWAYS PRIOR TO

ARCHITECTURAL CONSULTANT:

also. design
a little story of design

STRUCTURAL& MEP CONSULTANTS

JASHRITHA ASSOCIATES
AND MEP PLANNERS
4th FLOOR(4B), HIG 129, KPHB COLONY, KUKATPALLY,
(SUB BRANCH:PR NAGAR ERRAGADDA.)
HYDERABAD 500072, TELANGANA, INDIA
Phone : 9700441106.
E-mail : jashreyansh.consultatns@gmail.com
& jashritha.mep@gmail.com

PROJECT:

ANKURA HOMES_THE WOODS
AT KEESARAGUTTA

DRAWING TITLE:

1215_EAST VILLA
PLINTH BEAM DETAILS

DESIGN ENGG : AJAY	APPROVED :
SCALE : NTS	DRAWN : PK
DATE : 23-09-2026	CHECKED : PRADEEP

DRAWING NO: SD-04
REV.NO:

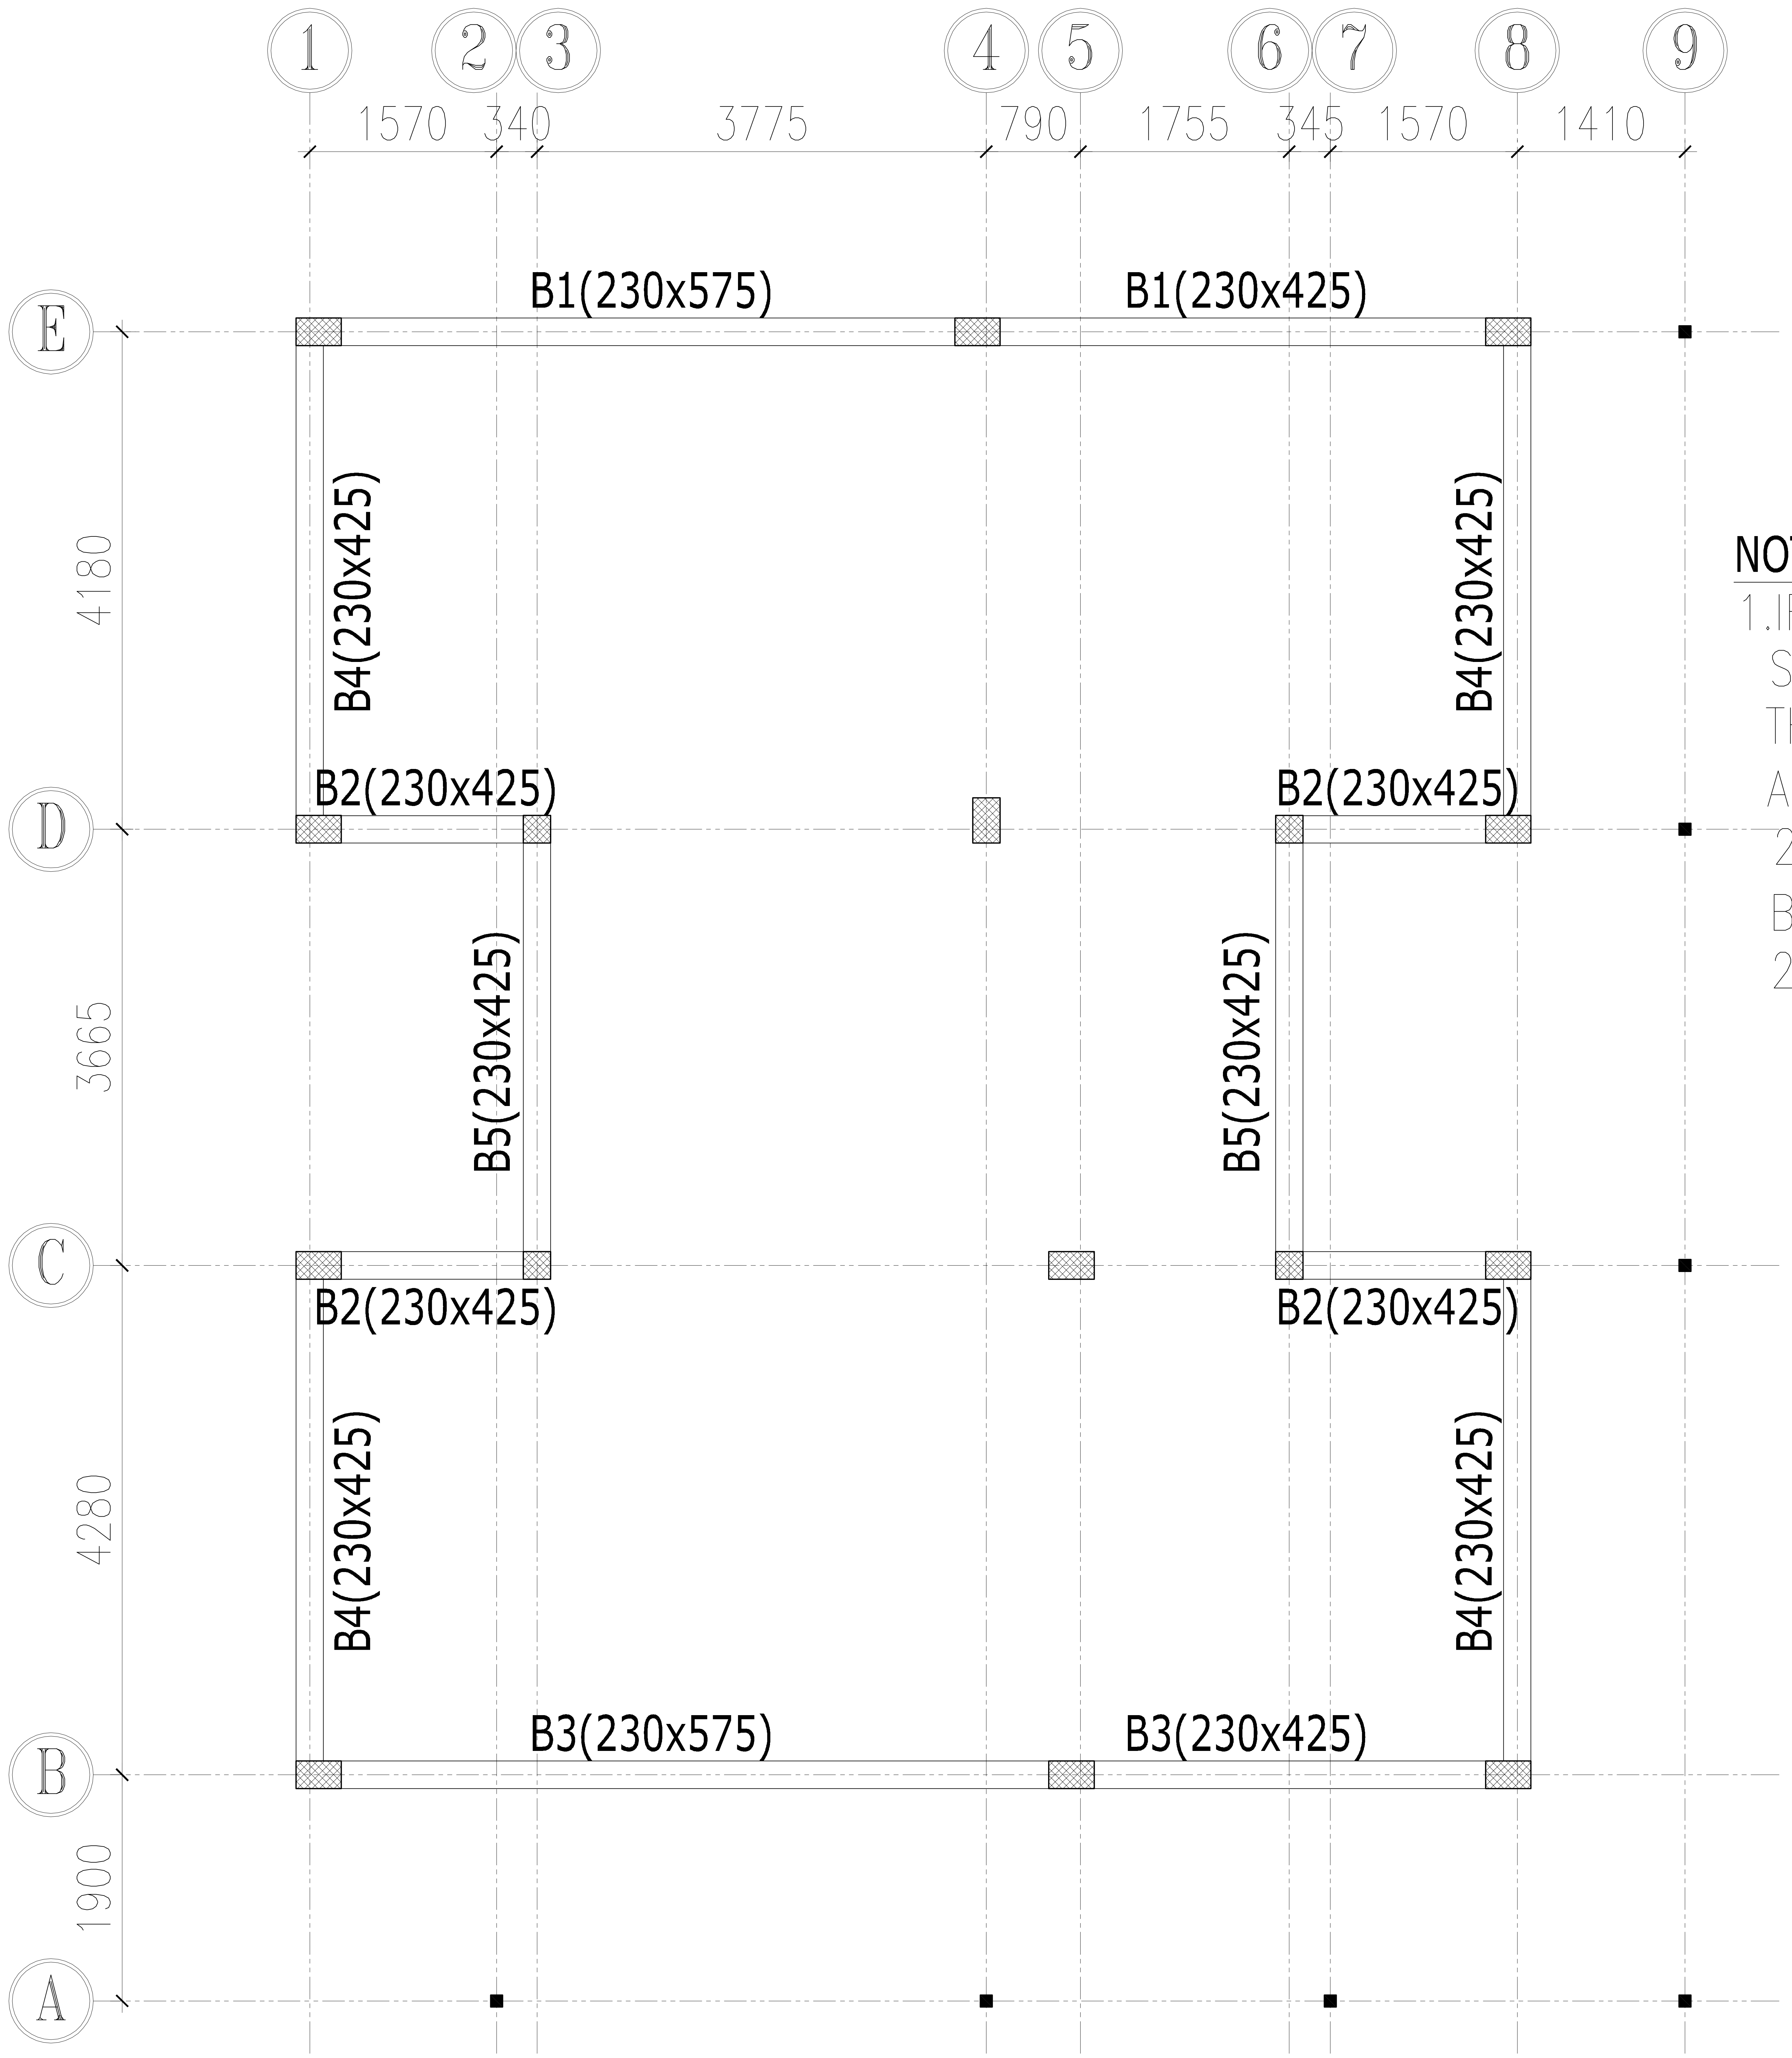
1
2
3
4
5
6
7
8
9
1570
340
3775
790
1755
345
1570
1410
E
D
C
B
A
4180
3665
4280
1900
B1(230x575)
B1(230x425)
B4(230x425)
B4(230x425)
B2(230x425)
B2(230x425)
B5(230x425)
B5(230x425)
B2(230x425)
B2(230x425)
B4(230x425)
B4(230x425)
B3(230x575)
B3(230x425)

NOTE:

1.IF YOU WANT ANY INTERNAL BEAMS FOR SLOPED ROOF STRUCTURE PLEASE MAINTAIN THE STEEL 2-#16(Top&Bottom) UPTO 3.5M ABOVE 3.5M SPAN MAINTAIN TOP STEEL
2-#16 ST+ 2-#12 EXT @ SUPPORTS
BOTTOM STEEL
2-#16 ST+ 2-#12 EXT @ MID SPAN

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, STRUCTURAL AND SERVICES DRAWINGS. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS AND RESOLVED AS SOON AS POSSIBLE BUT ALWAYS PRIOR TO

DIRECTION:

ARCHITECTURAL CONSULTANT:

also. design
a little story of design

STRUCTURAL& MEP CONSULTANTS

JASHRITHA ASSOCIATES
AND MEP PLANNERS
4th FLOOR(4B), HIG 129, KPHB COLONY, KUKATPALLY,
(SUB BRANCH:PR NAGAR ERRAGADDA.)
HYDERABAD 500072, TELANGANA, INDIA
Phone : 9700441106.
E-mail : jashreyansh.consultatns@gmail.com
& jashritha.mep@gmail.com

PROJECT:

ANKURA HOMES_THE WOODS
AT KEESARAGUTTA

DRAWING TITLE:

1215_EAST VILLA
ROOF BEAM LAYOUT

DESIGN ENGG : AJAY	APPROVED :
SCALE : NTS	DRAWN : PK
DATE : 23-09-2026	CHECKED : PRADEEP
DRAWING NO: SD-05	REV.NO:

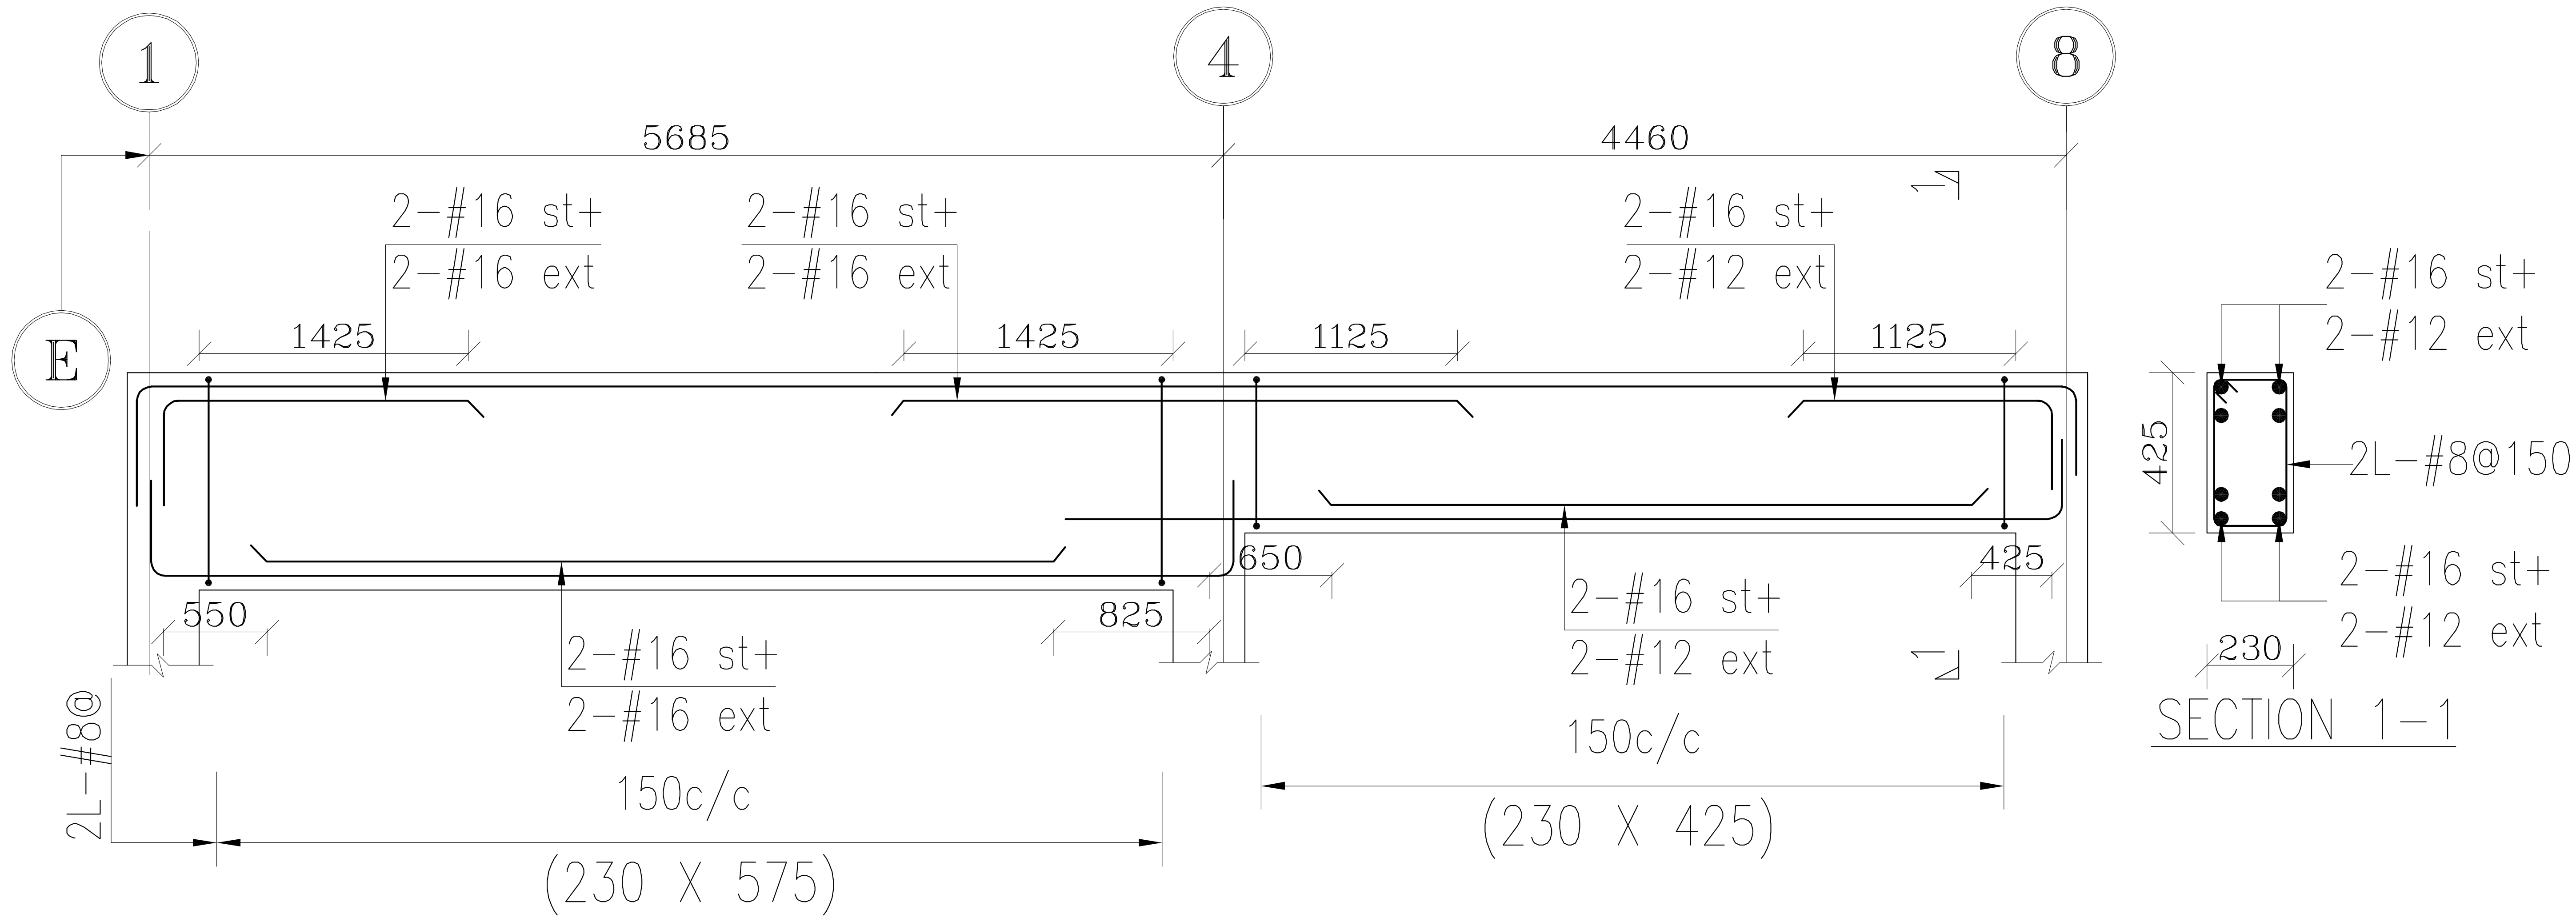
1
4
8
5685
4460
E
2-#16 st+
2-#16 ext
2-#16 st+
2-#16 ext
2-#16 st+
2-#12 ext
1425
1425
1125
1125
550
825
650
425
2-#16 st+
2-#16 ext
2-#16 st+
2-#12 ext
2L-#8@
150c/c
150c/c
(230 X 575)
(230 X 425)
1
1
425
230
2-#16 st+
2-#12 ext
2L-#8@150c/c
2-#16 st+
2-#12 ext
SECTION 1-1

L/S OF BEAM B1(230X575/425)

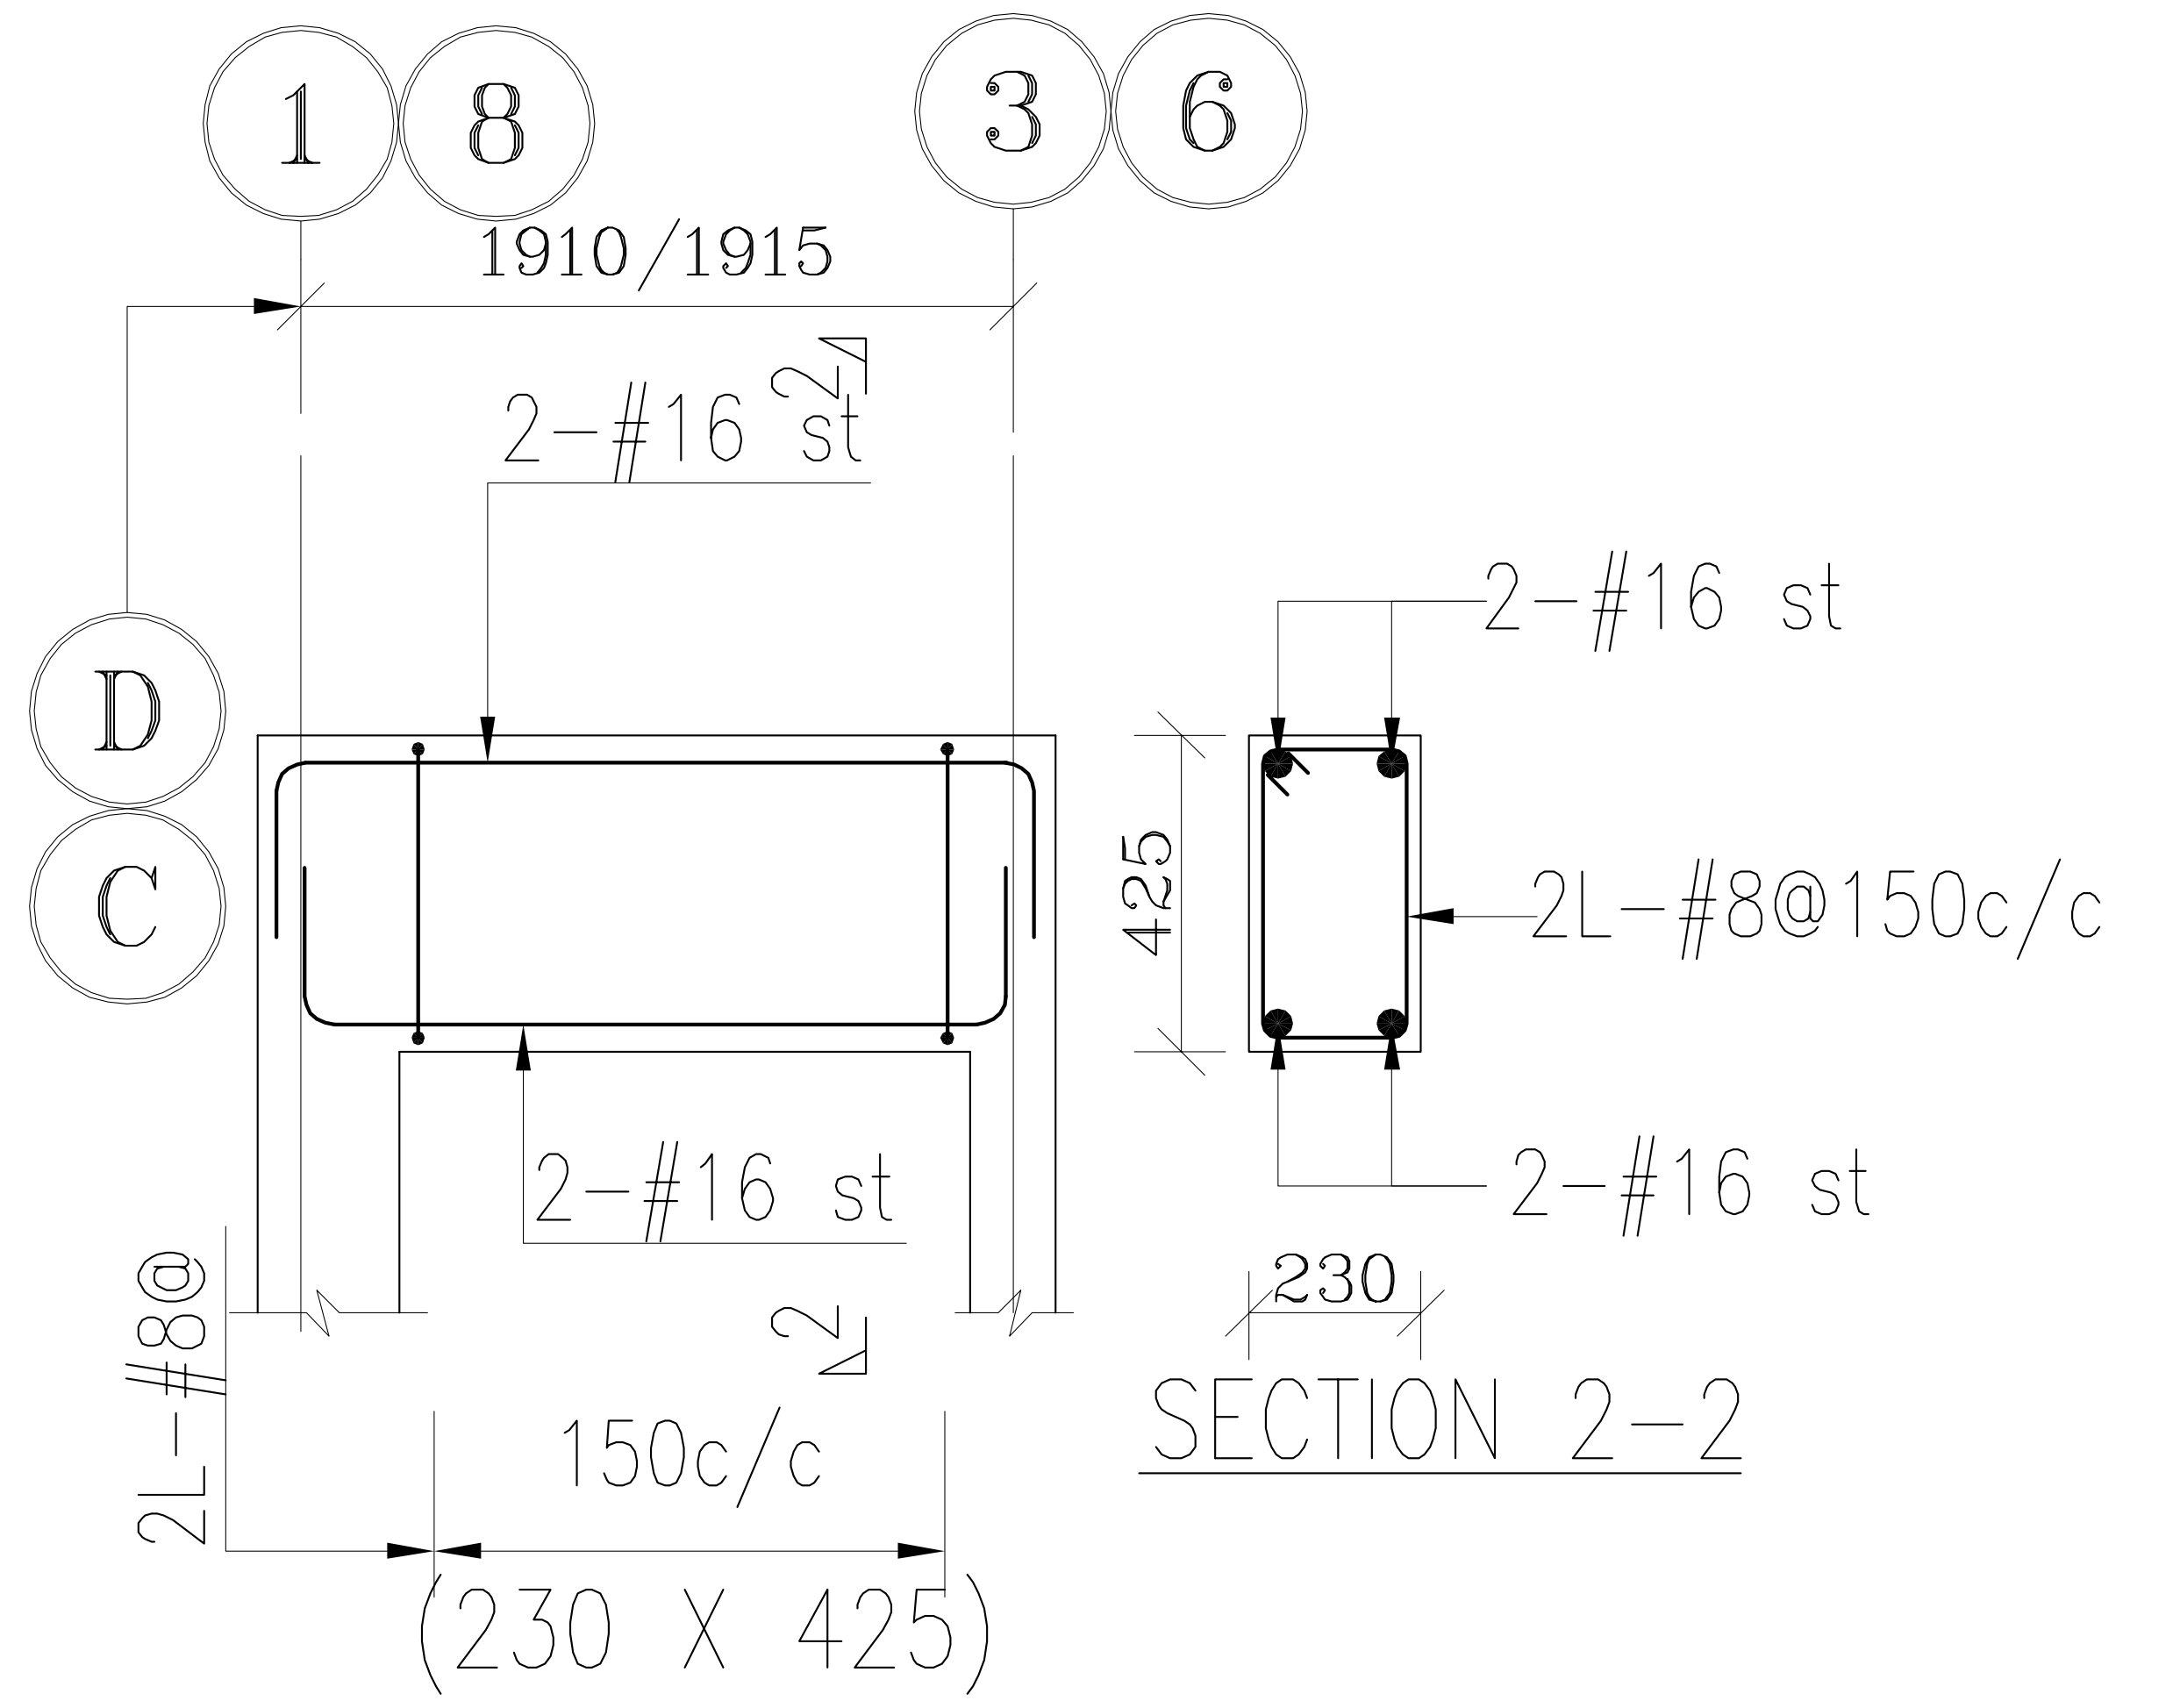
1
8
3
6
1910/1915
D
C
2-#16 st
2
2-#16 st
2
2L-#8@
150c/c
(230 X 425)
425
230
2-#16 st
2L-#8@150c/c
2-#16 st
SECTION 2-2

L/S OF BEAM B2(230X425)

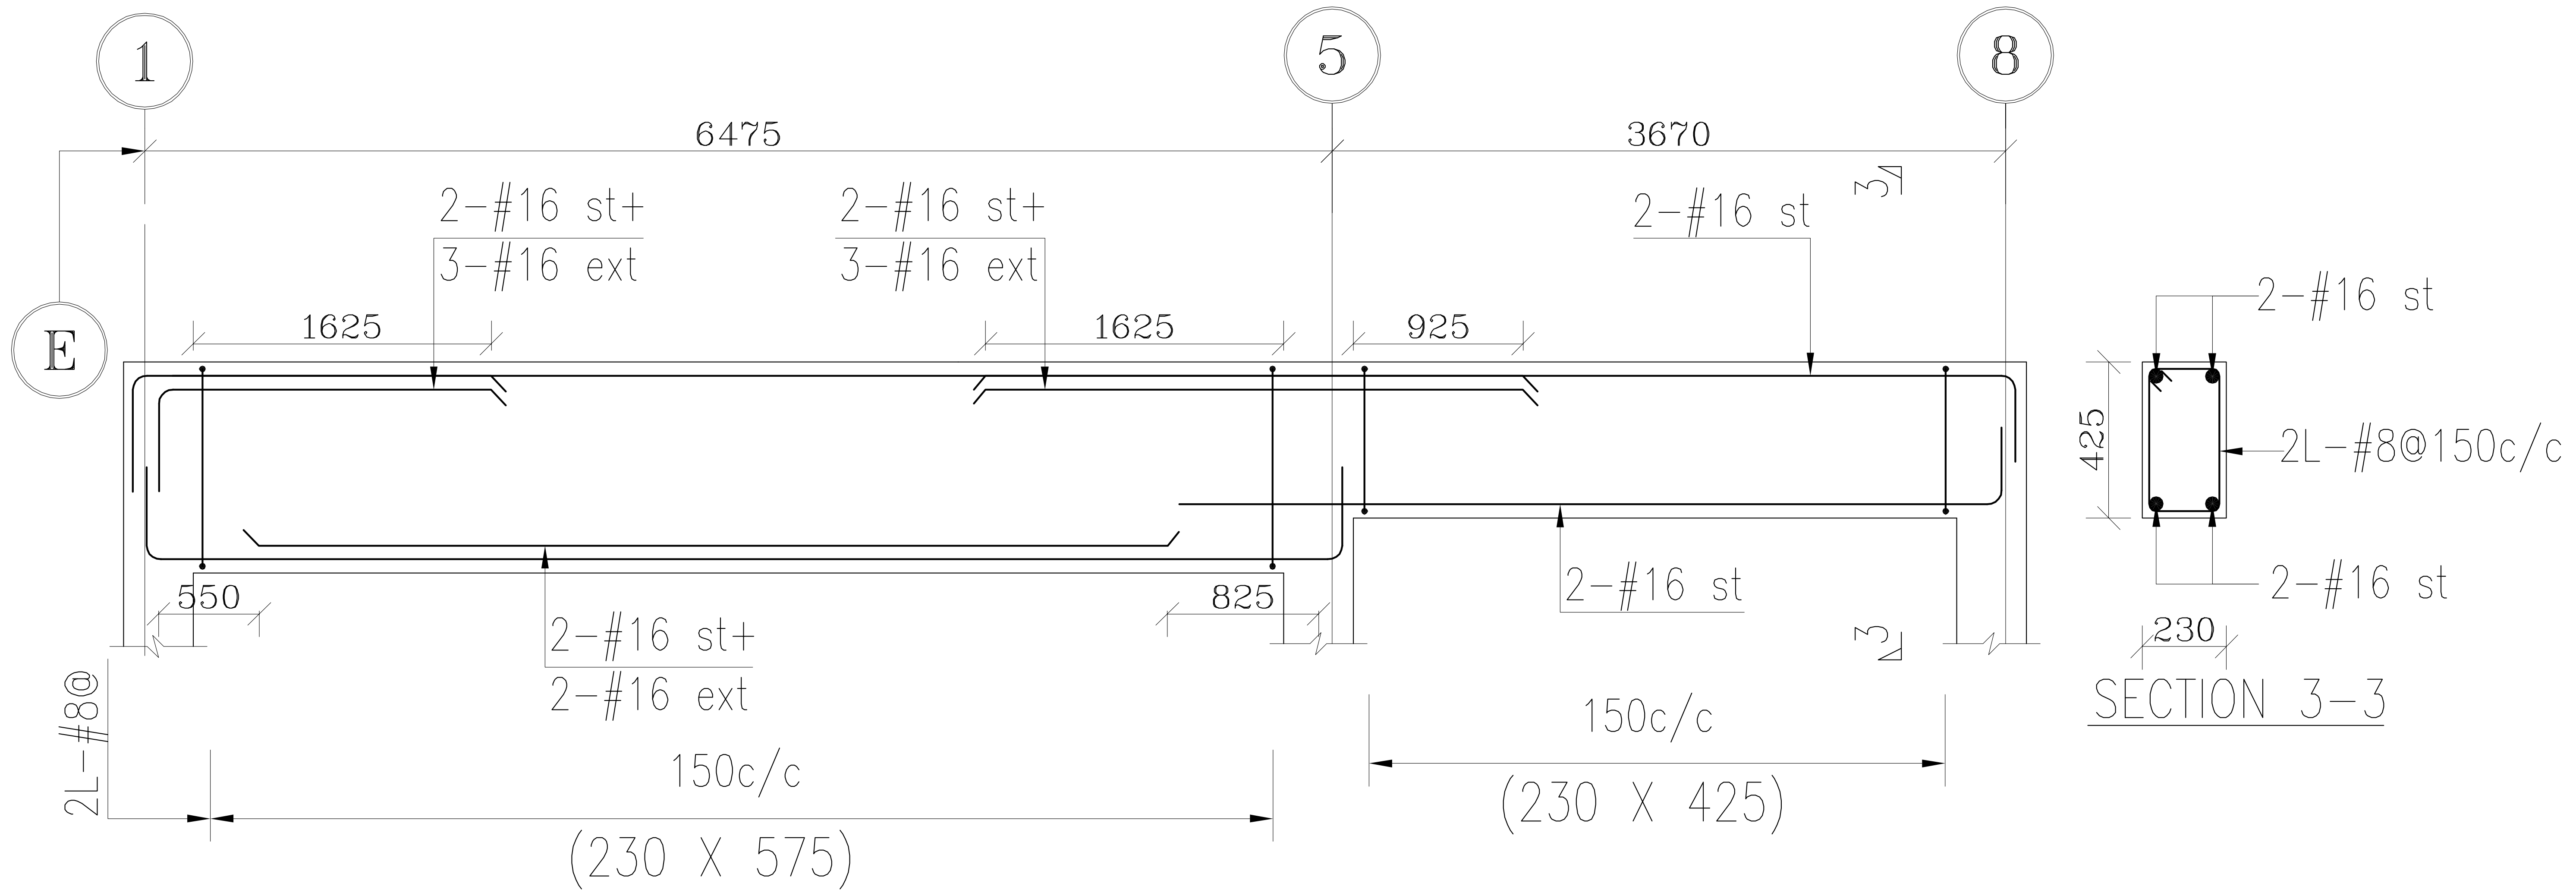
1
5
8
6475
3670
E
2-#16 st+
3-#16 ext
2-#16 st+
3-#16 ext
2-#16 st
3
1625
1625
925
550
825
2-#16 st+
2-#16 ext
2-#16 st
3
2L-#8@
150c/c
150c/c
(230 X 575)
(230 X 425)
425
230
2-#16 st
2L-#8@150c/c
2-#16 st
SECTION 3-3

L/S OF BEAM B3(230X575/425)

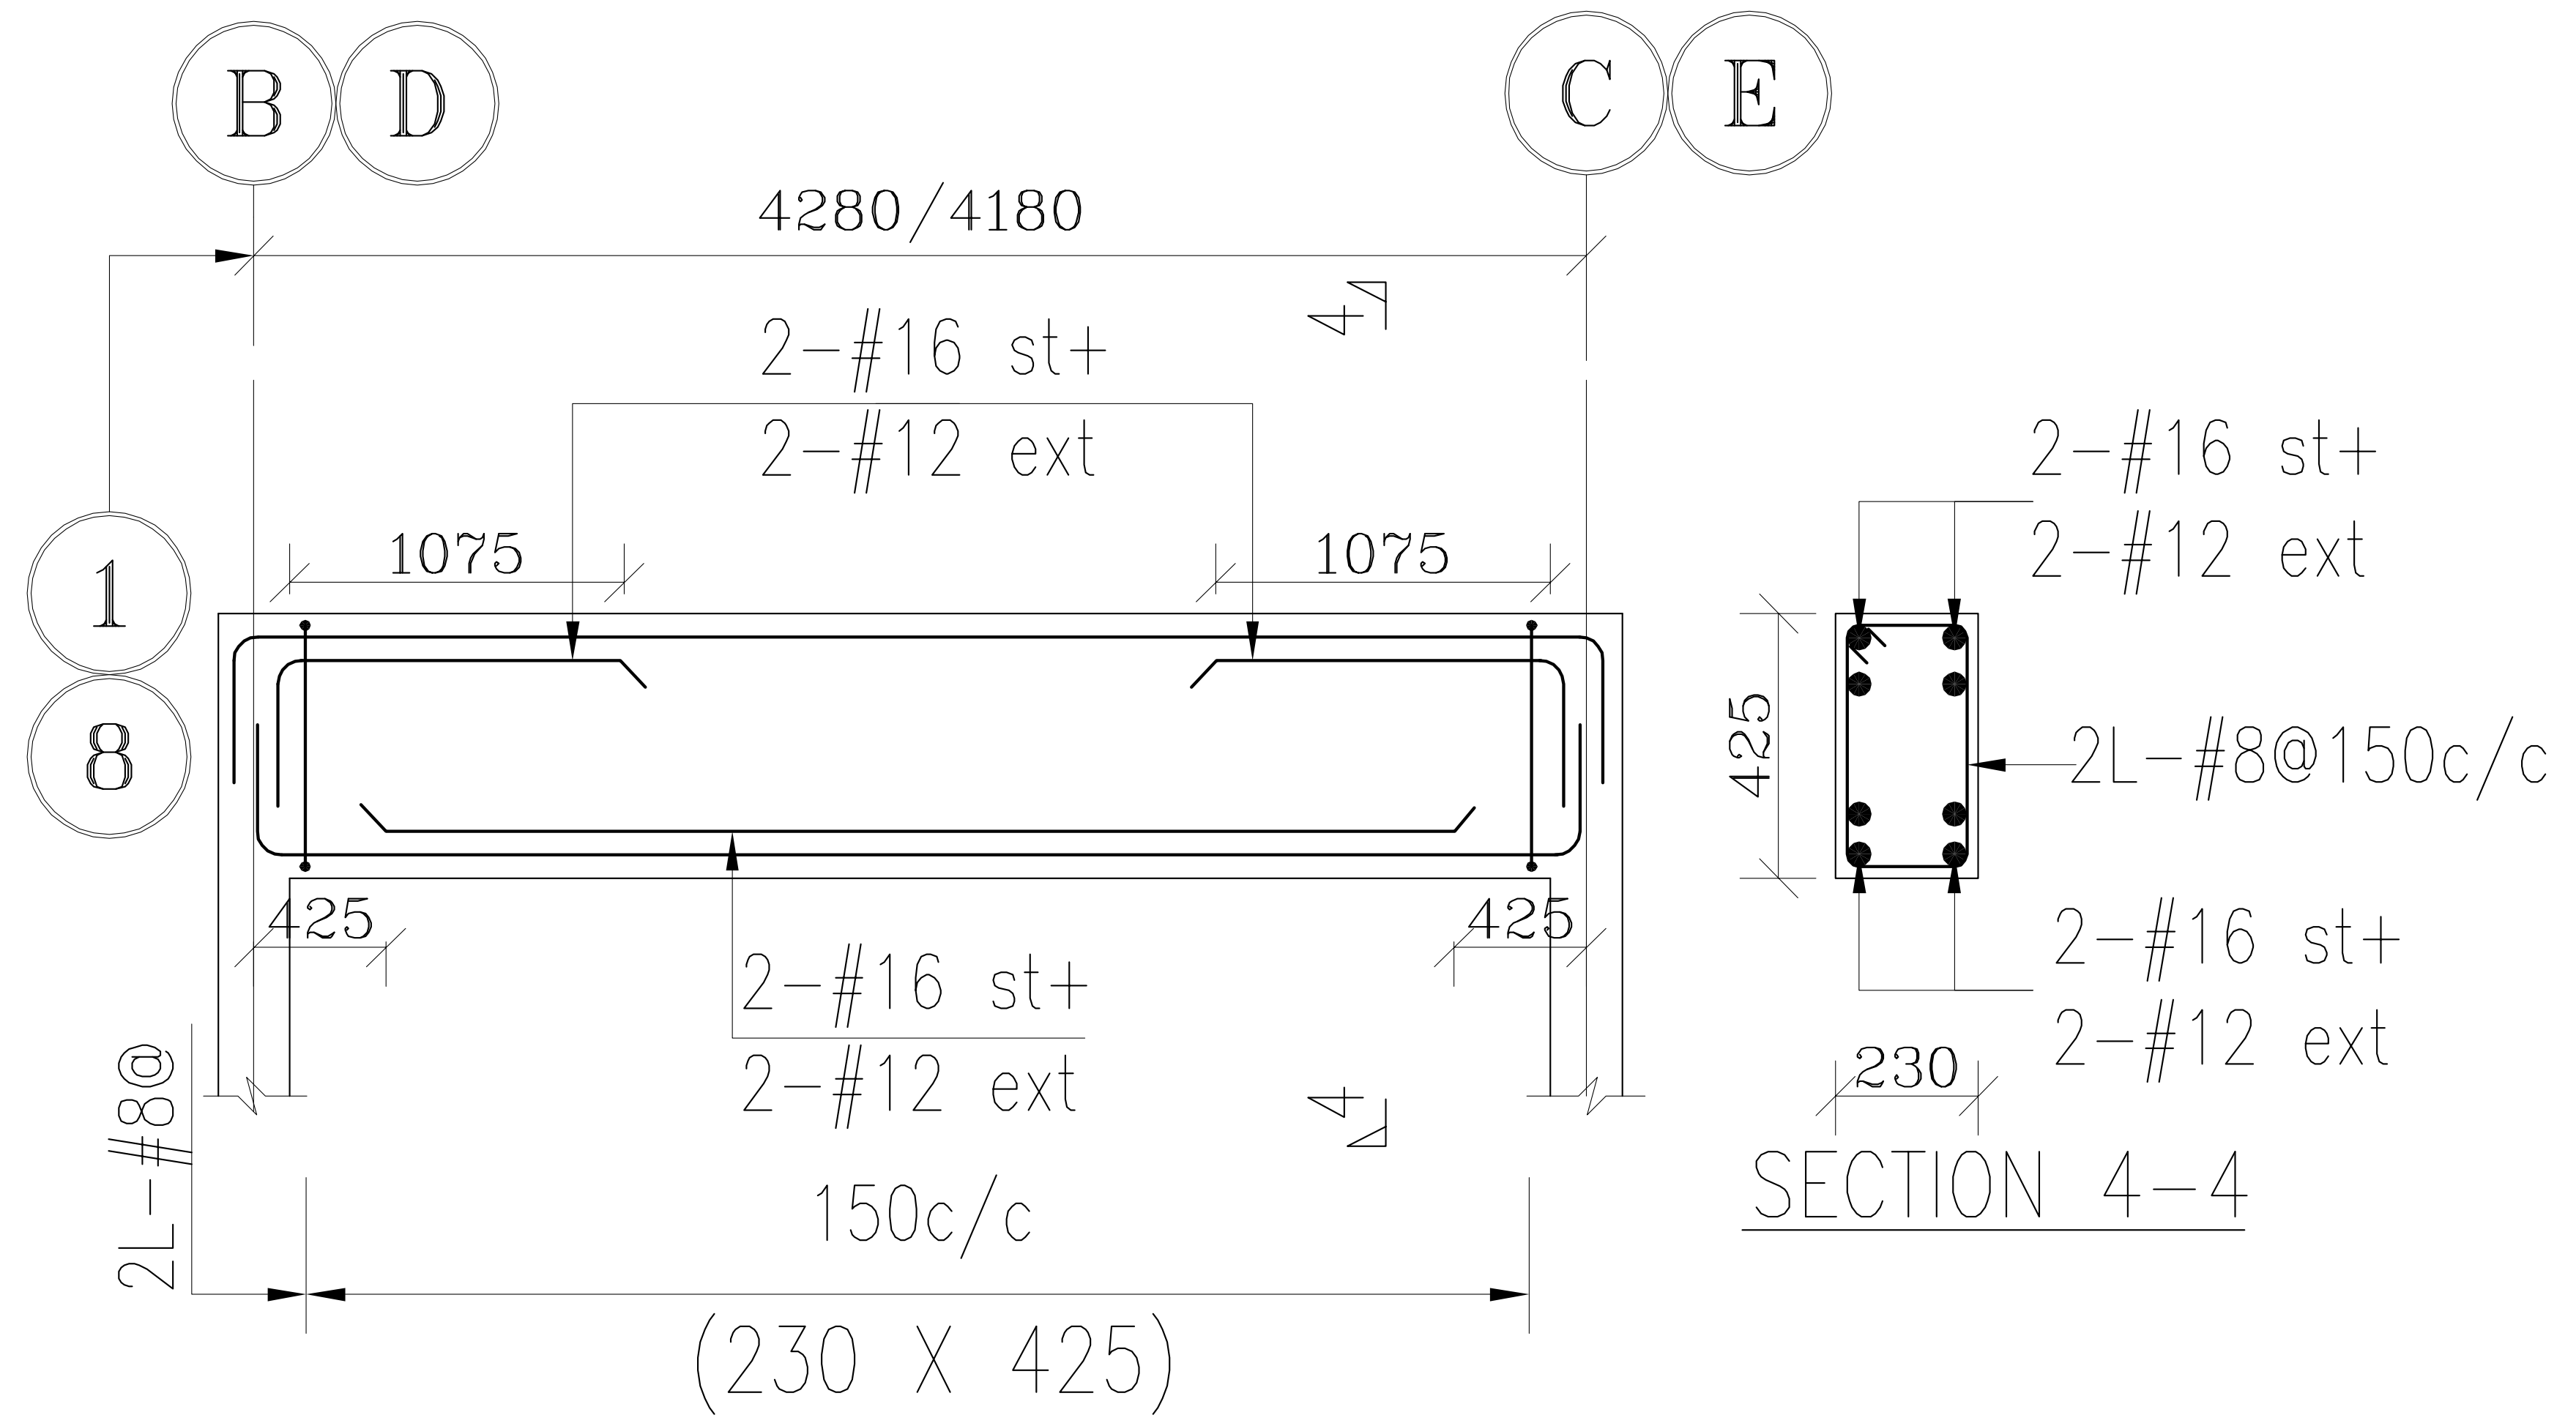
B
D
C
E
4280/4180
4
2-#16 st+
2-#12 ext
1075
1075
1
8
425
425
2-#16 st+
2-#12 ext
4
2L-#8@
150c/c
(230 X 425)
425
230
2-#16 st+
2-#12 ext
2L-#8@150c/c
2-#16 st+
2-#12 ext
SECTION 4-4

L/S OF BEAM B4(230X425)

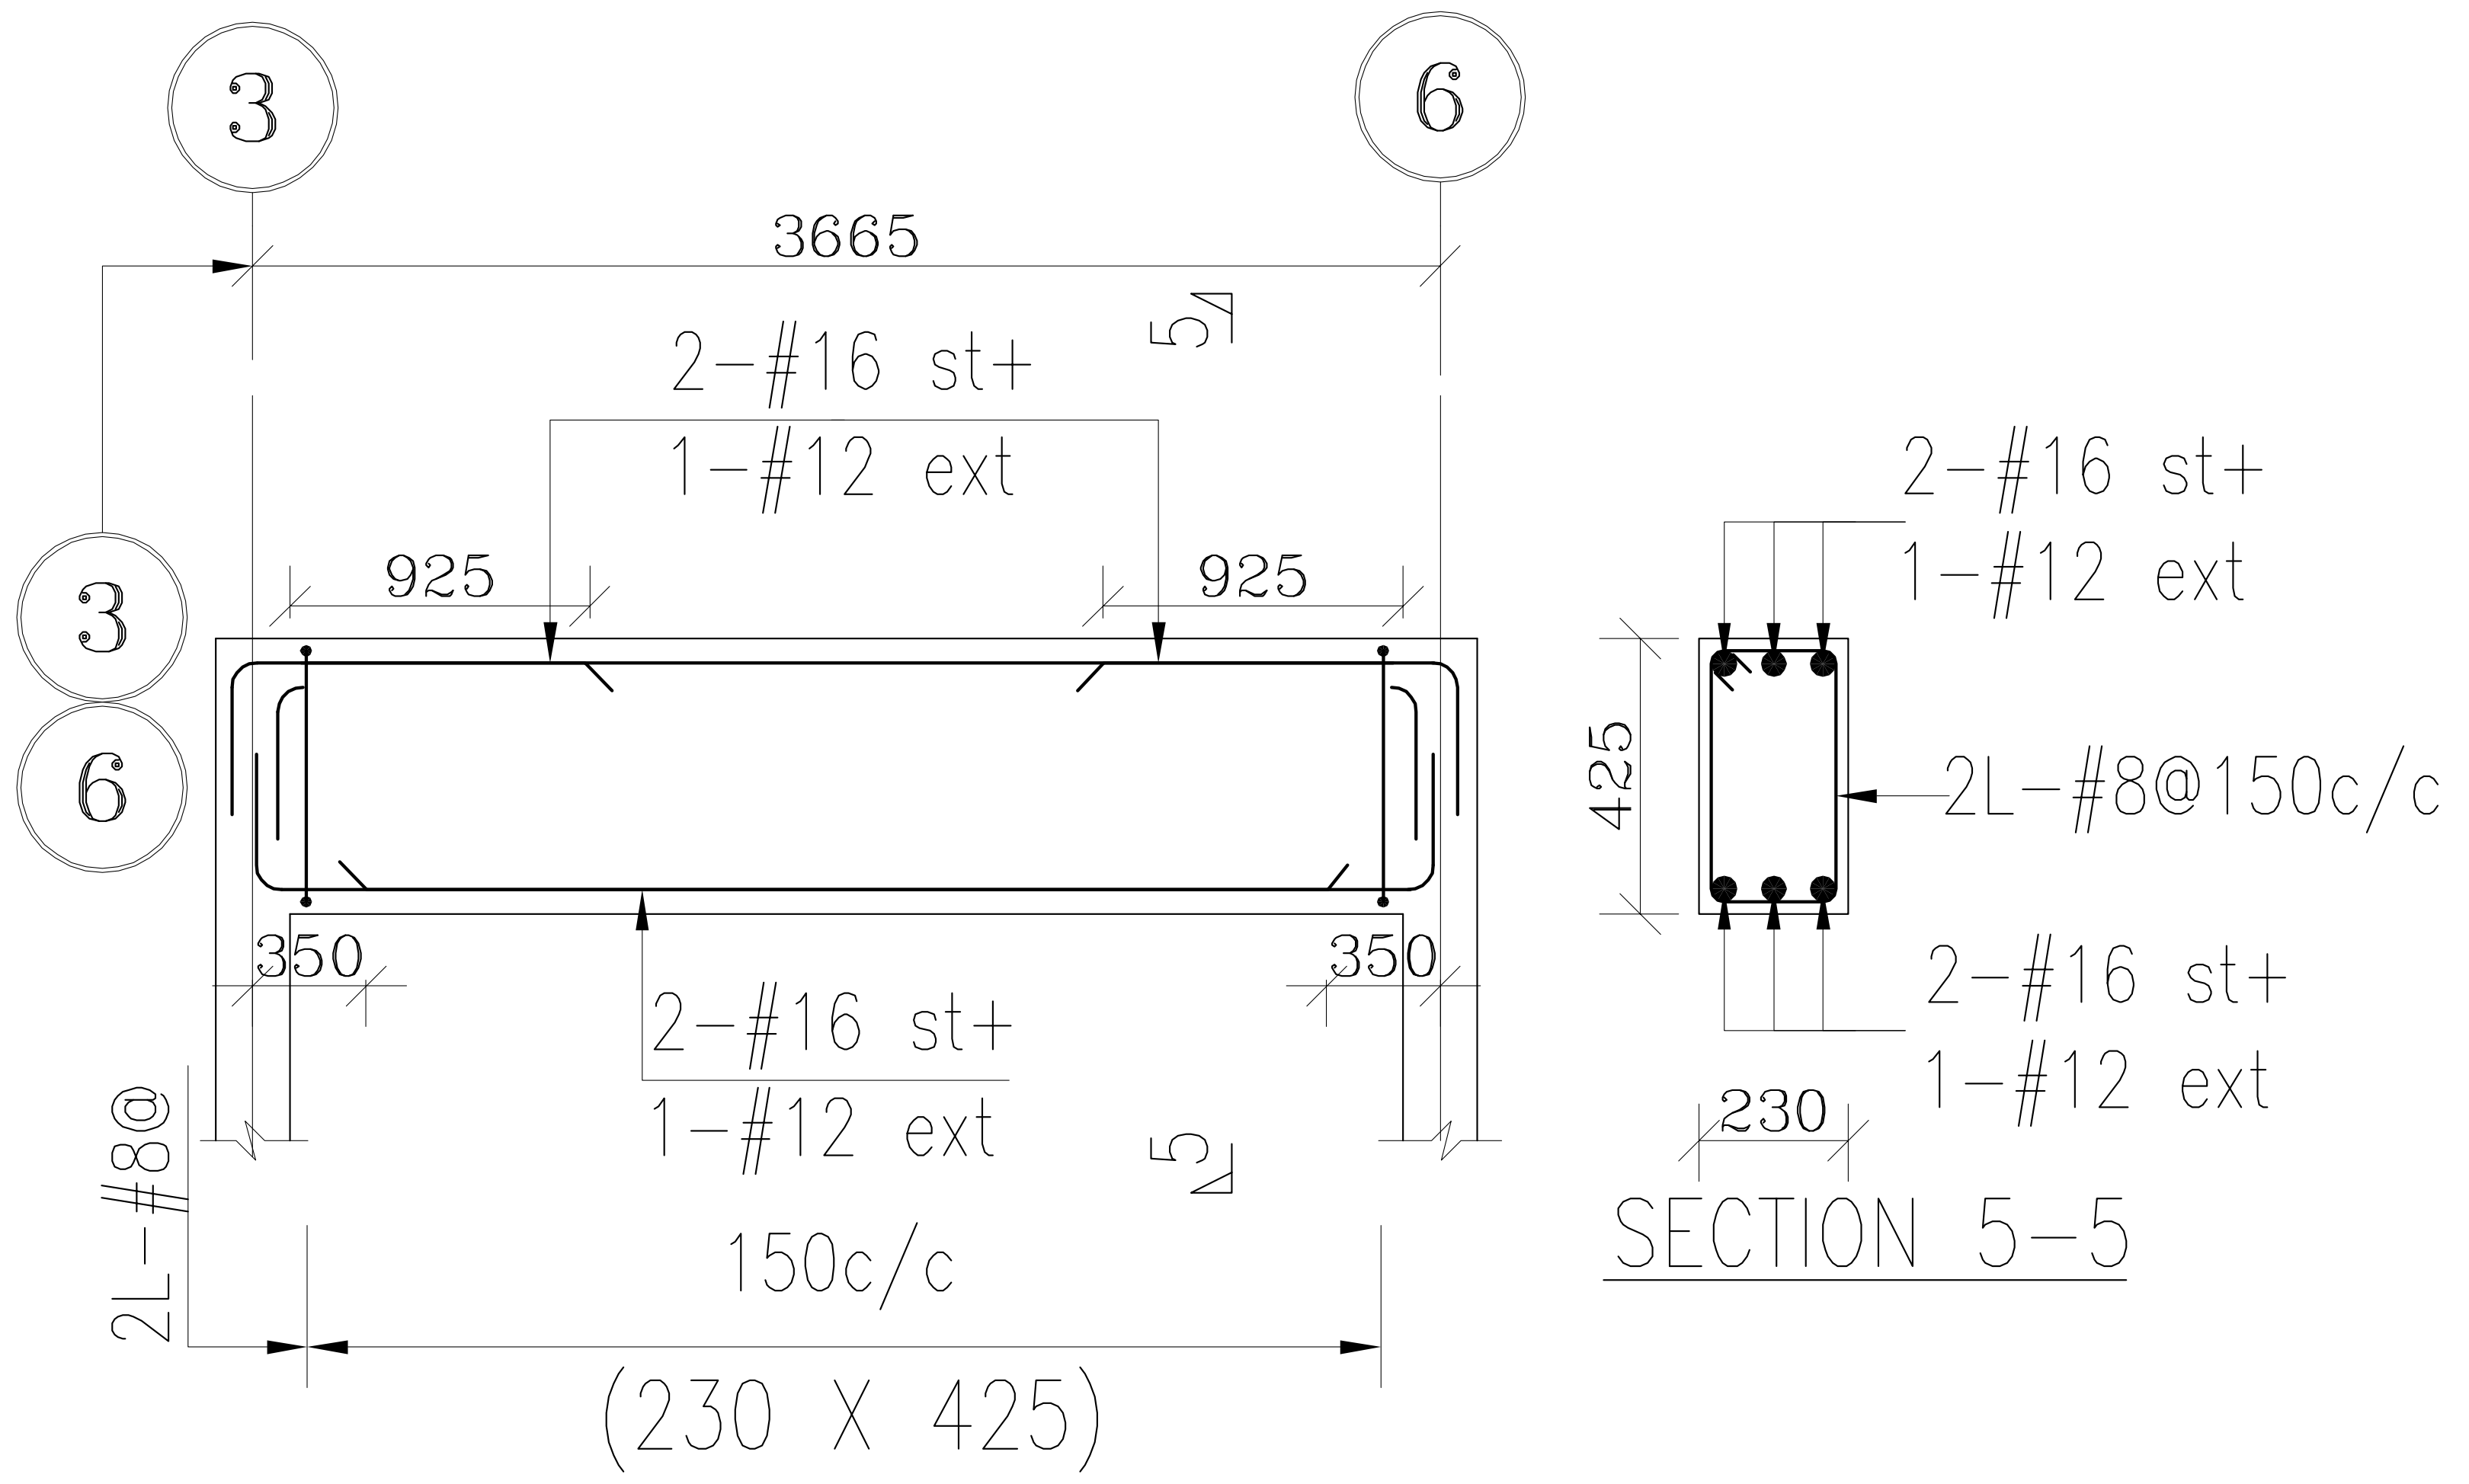
3
6
3665
5
2-#16 st+
1-#12 ext
925
925
3
6
350
350
2-#16 st+
1-#12 ext
5
2L-#8@
150c/c
(230 X 425)
425
230
2-#16 st+
1-#12 ext
2L-#8@150c/c
2-#16 st+
1-#12 ext
SECTION 5-5

L/S OF BEAM B5(230X425)

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, STRUCTURAL AND SERVICES DRAWINGS. ANY DISCREPANCY NOTICED SHALL BE BROUGHT TO THE ATTENTION OF THE CONSULTANTS AND RESOLVED AS SOON AS POSSIBLE BUT ALWAYS PRIOR TO

DIRECTION:

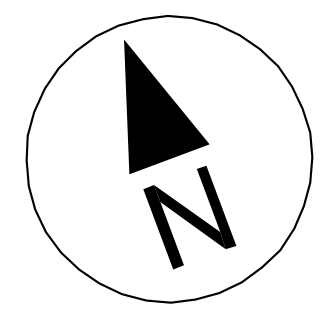

ARCHITECTURAL CONSULTANT:

also. design
a little story of design

STRUCTURAL& MEP CONSULTANTS

JASHRITHA ASSOCIATES
AND MEP PLANNERS
4th FLOOR(4B), HIG 129, KPHB COLONY, KUKATPALLY,
(SUB BRANCH:PR NAGAR ERRAGADDA.)
HYDERABAD 500072, TELANGANA, INDIA
Phone : 9700441106.
E-mail : jashreyansh.consultatns@gmail.com
& jashritha.mep@gmail.com

PROJECT:

ANKURA HOMES_THE WOODS
AT KEESARAGUTTA

DRAWING TITLE:

1215_EAST VILLA
ROOF BEAM DETAILS

DESIGN ENGG : AJAY	APPROVED :
SCALE : NTS	DRAWN : PK
DATE : 23-09-2026	CHECKED : PRADEEP

DRAWING NO: SD-06
REV.NO: